


FP-0226 - Plugs

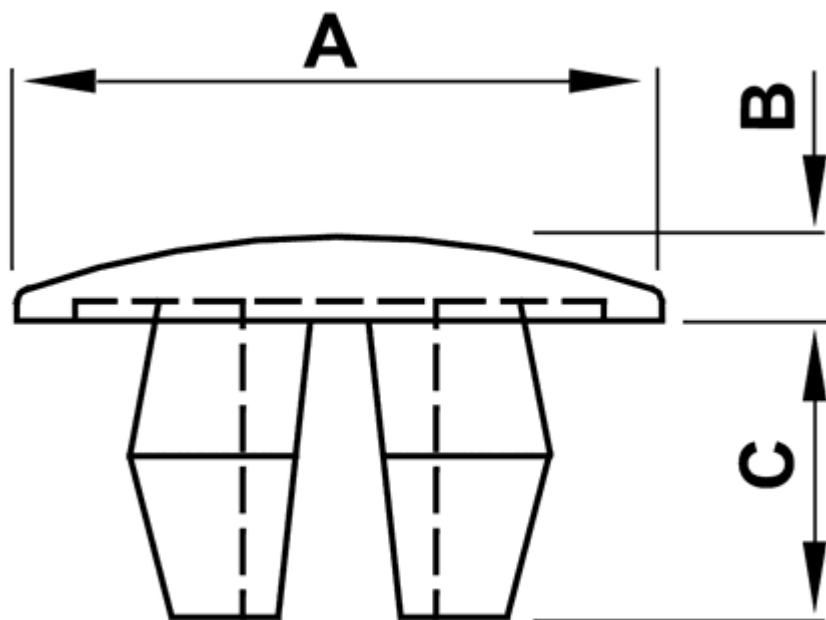

Details:

- **Material:** Nylon 6.6
- **Flammability:** UL94V2
- **Color:** natural or black
- **Working temperature:** -30°C do +85°C

Symbol	Flange diameter A	B	Height C	Mounting hole diameter	Panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
0226AA01	8	1.5	5.5	4	0.5 - 3.0	2500	PA 66	UL94 V-2	black
0226AA00	8	1.5	5.5	4	0.5 - 3.0	2500	PA 66	UL94 V-2	natural
0227AA01	10.3	1.5	5.5	5.5	0.5 - 3.0	2500	PA 66	UL94 V-2	black
0227AA00	10.3	1.5	5.5	5.5	0.5 - 3.0	2500	PA 66	UL94 V-2	natural
0228AA01	10.5	1.5	5.5	6	0.5 - 3.0	2500	PA 66	UL94 V-2	black
0228AA00	10.5	1.5	5.5	6	0.5 - 3.0	2500	PA 66	UL94 V-2	natural
0230AA01	12.5	1.5	6	8	0.5 - 3.0	2500	PA 66	UL94 V-2	black
0230AA00	12.5	1.5	6	8	0.5 - 3.0	2500	PA 66	UL94 V-2	natural
1099AA01	14.5	2	8	8	0.5 - 4.0	2500	PA 66	UL94 V-2	black
1099AA00	14.5	2	8	8	0.5 - 4.0	2500	PA 66	UL94 V-2	natural
0231AA01	14	2	7.3	9.5	0.5 - 4.0	2500	PA 66	UL94 V-2	black
0231AA00	14	2	7.3	9.5	0.5 - 4.0	2500	PA 66	UL94 V-2	natural
0232AA01	17.5	2	6.5	12.5	0.5 - 2.5	2500	PA 66	UL94 V-2	black
0232AA00	17.5	2	6.5	12.5	0.5 - 2.5	2500	PA 66	UL94 V-2	natural
2338AA01	24	3	5.5	16	0.5 - 1.2	2500	PA 66	UL94 V-2	black
0233AA01	25	2	8.5	19.5	1.0 - 4.0	2500	PA 66	UL94 V-2	black

Symbol	Flange diameter A	B	Height C	Mounting hole diameter	Panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
0233AA00	25	2	8.5	19.5	1.0 - 4.0	2500	PA 66	UL94 V-2	natural
2472AA01	27	2	6	23	0.5 - 2.0	2500	PA 66	UL94 V-2	black
2472AA00	27	2	6	23	0.5 - 2.0	2500	PA 66	UL94 V-2	natural
0235AA01	31.5	2	6.5	25	0.5 - 3.0	2500	PA 66	UL94 V-2	black
0235AA00	31.5	2	6.5	25	0.5 - 3.0	2500	PA 66	UL94 V-2	natural