
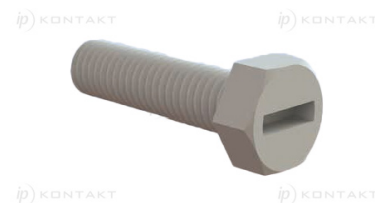


FP-0500 - Screw with hexagonal slotted head

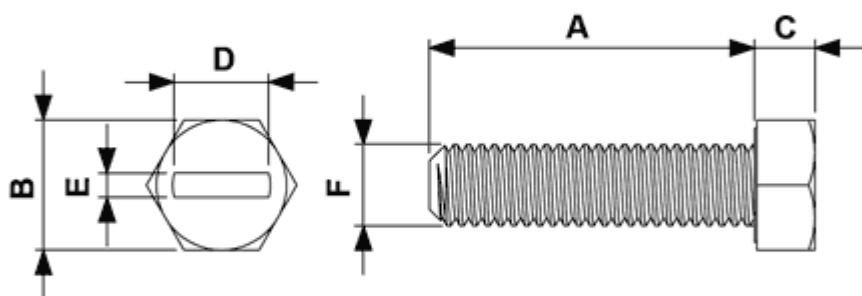

Details:

- **Material: PA 6**
- **Flammability: UL94V2**
- Color: natural
- Working temperature: -35°C to +85°C
- Standard pack: 1000 pcs

Symbol	Thread length A	Wrench size B	Head height C	D	E	Thread F	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
0500AA00	10	7	2.8	5	1.1	M4	PA 6	UL94 V-2	natural
0502AA00	15	7	2.8	5	1.1	M4	PA 6	UL94 V-2	natural
0503AA00	20	7	2.8	5	1.1	M4	PA 6	UL94 V-2	natural
0504AA00	25	7	2.8	5	1.1	M4	PA 6	UL94 V-2	natural
0505AA00	30	7	2.8	5	1.1	M4	PA 6	UL94 V-2	natural
0532AA00	10	8	3.7	6	1.4	M5	PA 6	UL94 V-2	natural
0533AA00	15	8	3.7	6	1.4	M5	PA 6	UL94 V-2	natural
0534AA00	20	8	3.7	6	1.4	M5	PA 6	UL94 V-2	natural
0535AA00	25	8	3.7	6	1.4	M5	PA 6	UL94 V-2	natural
0536AA00	30	8	3.7	6	1.4	M5	PA 6	UL94 V-2	natural
4006AA00	15	10	4.3	7.8	1.5	M6	PA 6	UL94 V-2	natural
0516AA00	20	10	4.3	7.8	1.5	M6	PA 6	UL94 V-2	natural
0517AA00	25	10	4.3	7.8	1.5	M6	PA 6	UL94 V-2	natural
0518AA00	30	10	4.3	7.8	1.5	M6	PA 6	UL94 V-2	natural
0542AA00	15	13	5.8	9.8	1.9	M8	PA 6	UL94 V-2	natural

Symbol	Thread length A	Wrench size B	Head height C	D	E	Thread F	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
0543AA00	20	13	5.8	9.8	1.9	M8	PA 6	UL94 V-2	natural
0544AA00	25	13	5.8	9.8	1.9	M8	PA 6	UL94 V-2	natural
0545AA00	30	13	5.8	9.8	1.9	M8	PA 6	UL94 V-2	natural
0546AA00	35	13	5.8	9.8	1.9	M8	PA 6	UL94 V-2	natural
0507AA00	20	17	7	12.8	2	M10	PA 6	UL94 V-2	natural
0508AA00	25	17	7	12.8	2	M10	PA 6	UL94 V-2	natural
0509AA00	30	17	7	12.8	2	M10	PA 6	UL94 V-2	natural
0510AA00	35	17	7	12.8	2	M10	PA 6	UL94 V-2	natural