


FP-0572 - Plastic screws, knurled

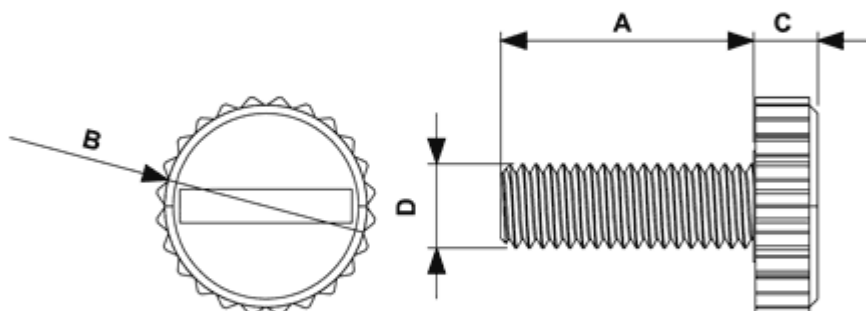

Details:

- **Material:** PA 6.6 25%GF
- **Flammability:** U:L94HB
- **Color:** black or white
- **Working temperature:** -35°C to +100°C

Symbol	Thread length A	Head diameter B	Head height C	Thread D	Material	Flammability	Color
	[mm]	[mm]	[mm]				
0572BB01	6	13	3.8	M4	PA + GF	UL94 HB	black
0572BB02	6	13	3.8	M4	PA + GF	UL94 HB	white
0573BB01	10	13	3.8	M4	PA + GF	UL94 HB	black
0573BB02	10	13	3.8	M4	PA + GF	UL94 HB	white
0574BB01	15	13	3.8	M4	PA + GF	UL94 HB	black
0574BB02	15	13	3.8	M4	PA + GF	UL94 HB	white
0575BB01	20	13	3.8	M4	PA + GF	UL94 HB	black
0575BB02	20	13	3.8	M4	PA + GF	UL94 HB	white
0582BB01	10	13	3.8	M5	PA + GF	UL94 HB	black
0582BB02	10	13	3.8	M5	PA + GF	UL94 HB	white
0583BB01	15	13	3.8	M5	PA + GF	UL94 HB	black
0583BB02	15	13	3.8	M5	PA + GF	UL94 HB	white
0584BB01	20	13	3.8	M5	PA + GF	UL94 HB	black
0584BB02	20	13	3.8	M5	PA + GF	UL94 HB	white
0588BB01	10	13	3.8	M6	PA + GF	UL94 HB	black
0588BB02	10	13	3.8	M6	PA + GF	UL94 HB	white

Symbol	Thread length A	Head diameter B	Head height C	Thread D	Material	Flammability	Color
	[mm]	[mm]	[mm]				
0589BB01	15	13	3.8	M6	PA + GF	UL94 HB	black
0589BB02	15	13	3.8	M6	PA + GF	UL94 HB	white
0590BB01	20	13	3.8	M6	PA + GF	UL94 HB	black
0590BB02	20	13	3.8	M6	PA + GF	UL94 HB	white