


FP-10048 - PCB spacers

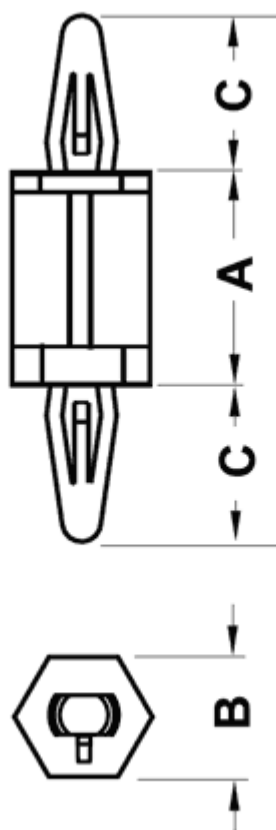

Details:

- **Material:** Nylon 6.6
- **Color:** black
- Flammability: UL94HB
- Working temperature: -30°C up to +85°C

Symbol	Height A	B	C	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
10048AA0103.0	3	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0104.0	4	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0105.0	5	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0106.0	6	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0107.0	7	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0108.0	8	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0109.0	9	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0110.0	10	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0111.0	11	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0112.0	12	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0113.0	13	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0114.0	14	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0115.0	15	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0116.0	16	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0117.0	17	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0118.0	18	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black

Symbol	Height A	B	C	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
10048AA0119.0	19	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0120.0	20	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0121.0	21	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0122.0	22	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0123.0	23	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0124.0	24	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0125.0	25	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0126.0	26	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0127.0	27	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0128.0	28	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0129.0	29	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0130.0	30	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0131.0	31	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0132.0	32	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0133.0	33	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0134.0	34	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0135.0	35	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0136.0	36	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0137.0	37	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0138.0	38	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0139.0	39	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0140.0	40	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0141.0	41	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0142.0	42	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0143.0	43	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0144.0	44	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0145.0	45	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0146.0	46	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0147.0	47	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0148.0	48	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0149.0	49	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0150.0	50	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0151.0	51	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0152.0	52	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0153.0	53	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0154.0	54	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0155.0	55	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0156.0	56	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0157.0	57	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0158.0	58	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0159.0	59	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0160.0	60	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0161.0	61	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0162.0	62	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0163.0	63	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0164.0	64	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black
10048AA0165.0	65	6	9.4	4	1.8	4	1.8	PA 66	UL94 HB	black