


FP-1043 - Knurled cap

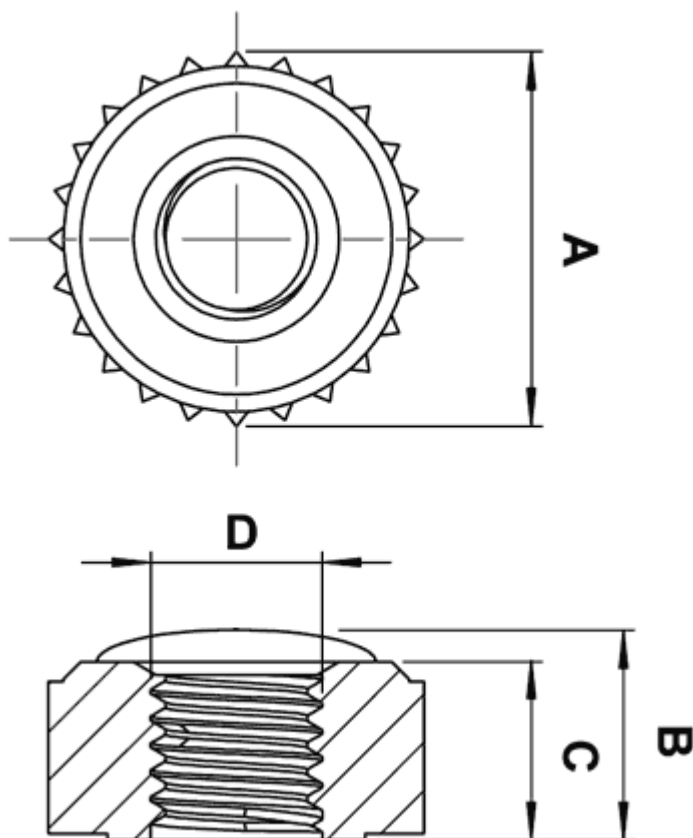

Details:

- **Material:** PA 6.6 25%GF
- **Flammability:** UL94HB
- **Color:** white or black
- Working temperature: -35°C to +100°C
- Standard pack: 1000 pcs

Symbol	A	Height B	Thread length C	Thread D	Material	Flammability	Color
	[mm]	[mm]	[mm]				
1043BB01	8	4	3	M3	PA 66 + GF	UL94 HB	black
1043BB02	8	4	3	M3	PA 66 + GF	UL94 HB	white
1044BB01	10	5.5	4.2	M4	PA 66 + GF	UL94 HB	black
1044BB02	10	5.5	4.2	M4	PA 66 + GF	UL94 HB	white
1046BB01	12.5	7.5	6	M6	PA 66 + GF	UL94 HB	black
1046BB02	12.5	7.5	6	M6	PA 66 + GF	UL94 HB	white
1045BB01	13	6.5	5.2	M5	PA 66 + GF	UL94 HB	black
1045BB02	13	6.5	5.2	M5	PA 66 + GF	UL94 HB	white
1047BB01	17.5	10	8.3	M8	PA 66 + GF	UL94 HB	black
1047BB02	17.5	10	8.3	M8	PA 66 + GF	UL94 HB	white
1048BB01	21.5	12.5	10	M10	PA 66 + GF	UL94 HB	black
1048BB02	21.5	12.5	10	M10	PA 66 + GF	UL94 HB	white