


FP-1055 - Knurled nuts

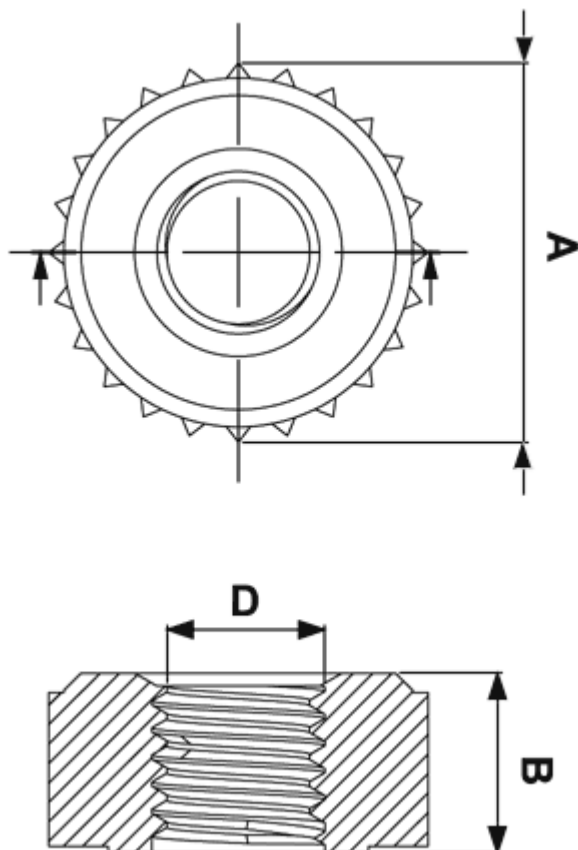

Details:

- **Material:** PA 6.6 25%GF
- **Flammability:** UL94HB
- **Color:** white or black
- Working temperature: -35°C to +100°C
- Standard pack: 1000 pcs

Symbol	A	Height B	Thread D	Material	Flammability	Color
	[mm]	[mm]				
1055BB01	8	3	M3	PA 66 + GF	UL94 HB	black
1055BB02	8	3	M3	PA 66 + GF	UL94 HB	white
1056BB01	10	4.2	M4	PA 66 + GF	UL94 HB	black
1056BB02	10	4.2	M4	PA 66 + GF	UL94 HB	white
1058BB01	12.5	6	M6	PA 66 + GF	UL94 HB	black
1058BB02	12.5	6	M6	PA 66 + GF	UL94 HB	white
1057BB01	13	5.2	M5	PA 66 + GF	UL94 HB	black
1057BB02	13	5.2	M5	PA 66 + GF	UL94 HB	white
1059BB01	17.5	8.3	M8	PA 66 + GF	UL94 HB	black
1059BB02	17.5	8.3	M8	PA 66 + GF	UL94 HB	white
1060BB01	21.5	10	M10	PA 66 + GF	UL94 HB	black
1060BB02	21.5	10	M10	PA 66 + GF	UL94 HB	white