


FP-11403 - Spacers with flat head

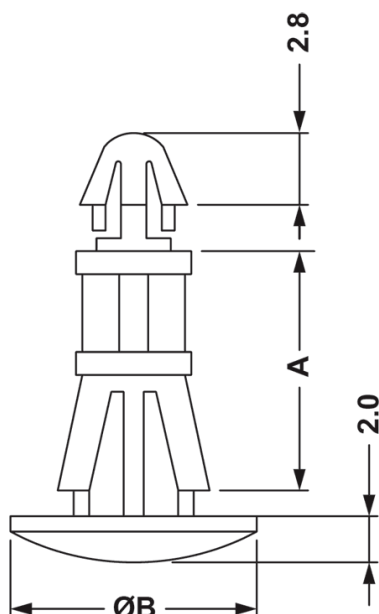

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL-94 V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
11403AA0003.5	3.5	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0004.8	4.8	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0006.3	6.3	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0007.0	7	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0008.0	8	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0010.0	10	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0011.0	11	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0012.7	12.7	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural
11403AA0015.9	15.9	9.5	3.5	1.6	5.5	0.8 - 1.2	PA 66	UL94 V-2	natural