


FP-11408 - Spacers with flat head

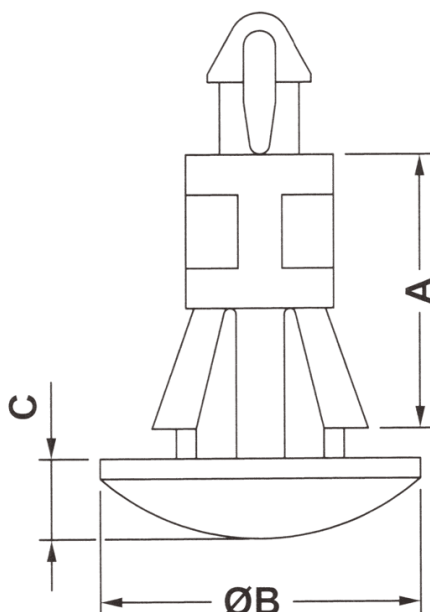

Details:

- **Material: PA 6.6**
- **Color: natural**
- Flammability: UL94 V-2
- Working temperature: -35°C up to +85°C

Symbol	Height A	B	C	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
11408AA0004.5	4.5	8	2	2	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11408AA0006.4	6.4	8	2	2	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11408AA0011.1	11.1	8	2	2	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11408AA0012.7	12.7	8	2	2	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0002.5	2.5	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0003.0	3	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0004.5	4.5	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0005.5	5.5	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0006.4	6.4	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0007.5	7.5	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0009.5	9.5	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0011.1	11.1	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural
11409AA0012.7	12.7	8	2	2.5	1.6	4	0.8 - 1.6	PA 66	UL94 V-2	natural