
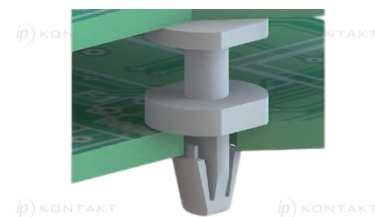


FP-11435 - PCB spacers

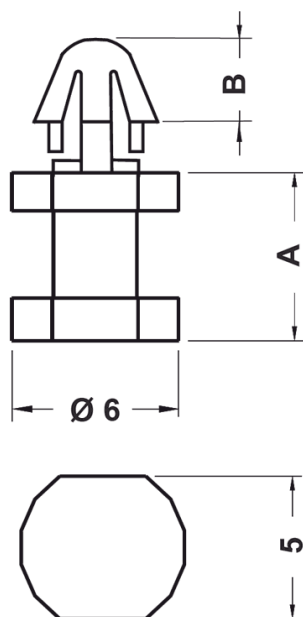

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL-94 V2
- Working temperature: -35°C up to +85°C
- Standard pack: 2000 pcs

Symbol	Height A	B	Mounting hole diameter	Panel thickness	Material	Flammability	Color
	[mm]		[mm]	[mm]			
11435AA0003.0	3	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0003.5	3.5	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0004.5	4	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0005.0	5	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0005.5	5.5	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0006.0	6	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0006.5	6.5	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0007.0	7	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0009.0	9	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0010.0	10	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0013.0	13	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0013.5	13.5	2.8	3.5	1.6	PA 66	UL94 V-2	natural
11435AA0026.0	26	2.8	3.5	1.6	PA 66	UL94 V-2	natural