


FP-11462 - Spacers with flat head

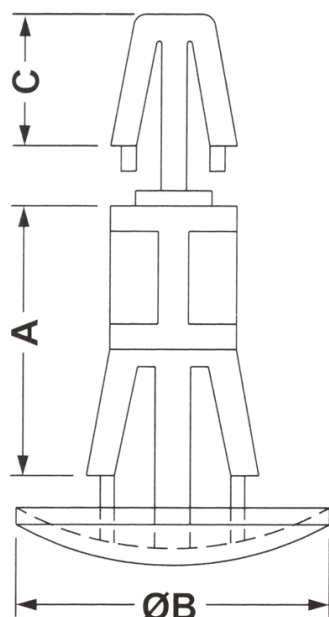

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL-94 V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
11462AA0003.5	3.5	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0005.0	5	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0006.3	6.3	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0008.0	8	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0010.0	10	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0012.7	12.7	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0015.9	15.9	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0019.0	19	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0025.4	25.4	4.2	1.7	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural
11462AA0035.5	35.5	11.3	4.2	11.3	4	1.6	5.5	1.5 - 2.2	PA 66	UL94 V-2	natural