


FP-12485 - Wire and pipe clips - screw mount

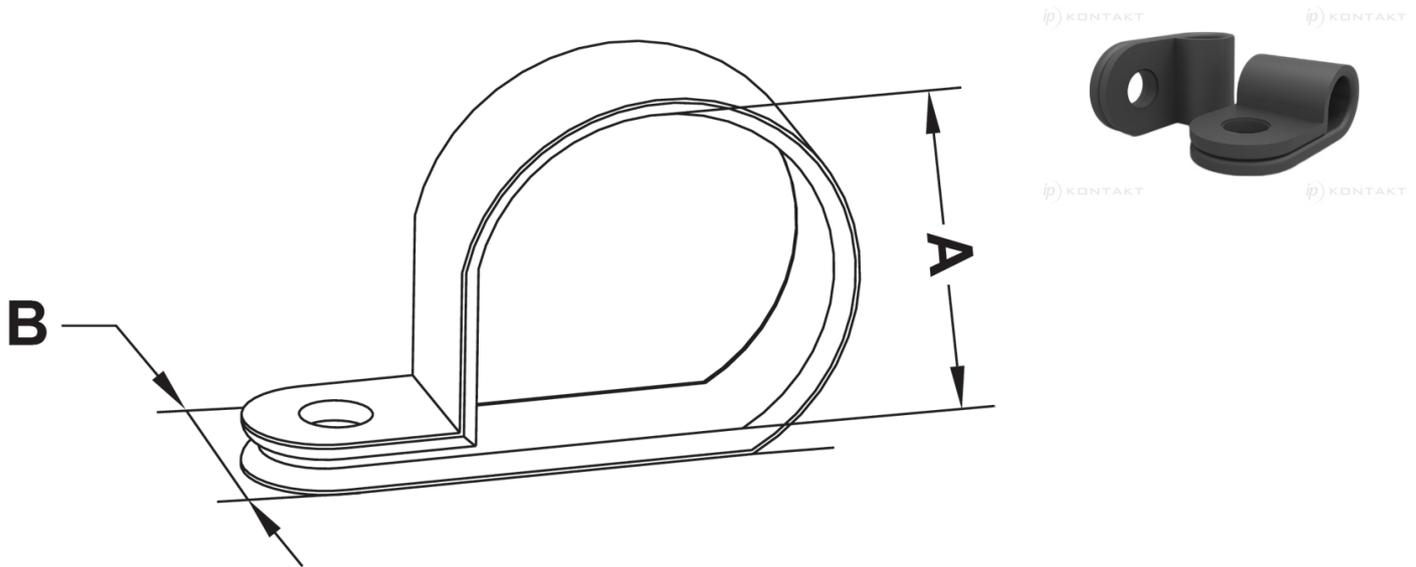

Details:

- **Material: PA 6.6**
- **Flammability: UL94 V-2**
- **Colour: natural or black**
- Working temperature: -35°C to 85°C
- Standard pack: 2000 pcs

Symbol	Max. cable bundle diameter A	B	Mounting hole diameter	Mounting screw	Thickness	Material	Flammability	Color
	[mm]				[mm]			
12485AA01	3.2	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12486AA01	4.7	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12487AA01	6.3	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12488AA01	7.9	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12489AA01	9.5	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12490AA01	11.1	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12491AA01	12.7	9.5	4.3	M4 max.	1.3	PA 66	UL94 V-2	black
12492AA01	3.2	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12493AA01	4.7	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12494AA01	6.3	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12495AA01	7.9	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12496AA01	9.5	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12497AA01	11.1	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12498AA01	12.7	9.5	5.2	M5 max.	1.3	PA 66	UL94 V-2	black
12600AA01	3.2	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12601AA01	4.7	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12602AA01	6.3	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12603AA01	7.9	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12604AA01	9.5	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12605AA01	11.1	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12606AA01	12.7	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12607AA01	14.3	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black

Symbol	Max. cable bundle diameter A	B	Mounting hole diameter	Mounting screw	Thickness	Material	Flammability	Color
	[mm]		[mm]		[mm]			
12608AA01	15.9	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12609AA01	17.4	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12610AA01	19.1	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12611AA01	20.6	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12612AA01	22.2	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12613AA01	25.4	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12614AA01	28.6	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12615AA01	30.1	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12616AA01	31.8	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12617AA01	34.9	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black
12618AA01	38.1	12.7	5.2	M5 max.	1.5	PA 66	UL94 V-2	black