
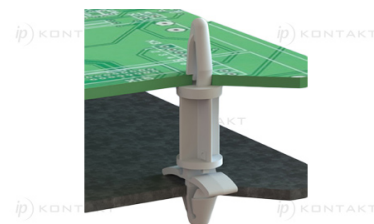


FP-12586 -

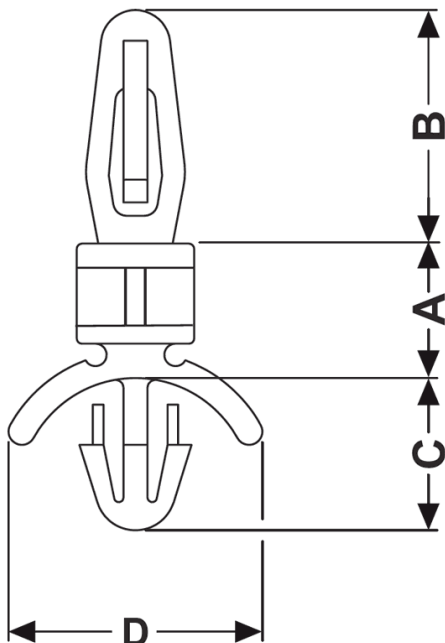

Details:

- **Material:** PA 6.6
- **Flammability:** UL94 V-2
- **Colour:** natural
- Working temperature: -35°C to 85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Top panel thickness range	Top mounting hole dia.	Bottom panel thickness range	Mounting hole diameter range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
12586AA00	3.2	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12587AA00	4.8	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12588AA00	6.4	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12589AA00	7.9	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12590AA00	9.5	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12591AA00	11.1	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12592AA00	12.7	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12593AA00	14.3	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12594AA00	15.9	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural
12595AA00	17	8.7	5.7	9.5	1.6 -1.7	3.2	0.8 - 2.0	3.0 - 3.2	PA 66	UL94 V-2	natural