


FP-16464 - Snap-fit grommets IP67

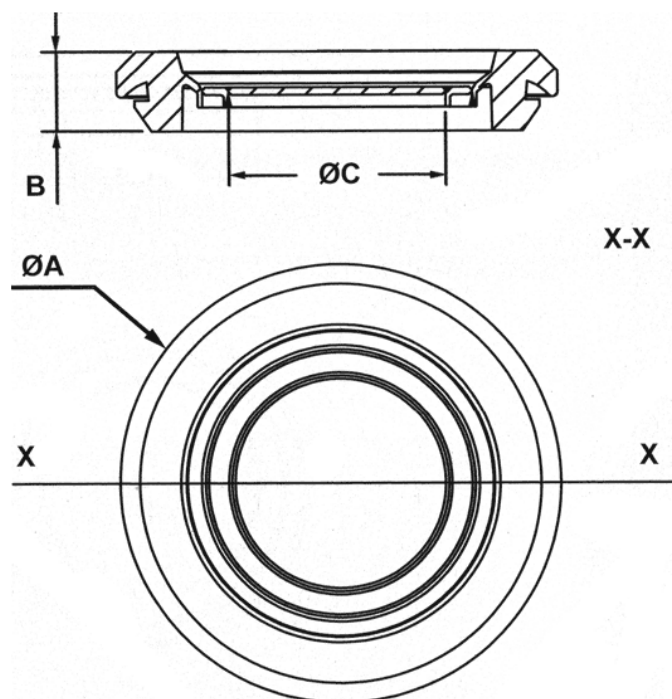

Details:

- **Material:** TPE
- **Colour:** black (RAL 9011), grey (RAL 7065), white
- Working temperature: -40°C to +100°C
- Protection grade: IP67
- For mounting holes with diameters of 100 and 120 mm protection grade is IP54

Symbol	Mounting hole diameter	Panel thickness range	ØA	B	ØC	Material	Flammability	Color	Standard pack
	[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
16464PF019011	9	1.0 - 3.5	18	9	2.0 - 6.0	TPE	-	black	500
16464PF117035	9	1.0 - 3.5	18	9	2.0 - 6.0	TPE	-	grey	500
16464PV02	9	1.0 - 3.5	18	9	2.0 - 6.0	TPE	UL94 V-0	white	500
22000PF019011	12	1.5 - 4.5	22	11	3.0 - 7.0	TPE	-	black	500
22000PF117035	12	1.5 - 4.5	22	11	3.0 - 7.0	TPE	-	grey	500
22000PV02	12	1.5 - 4.5	22	11	3.0 - 7.0	TPE	UL94 V-0	white	500
22001PF019011	16	1.5 - 4.5	23.5	11	5.0 - 10.0	TPE	-	black	500
22001PF117035	16	1.5 - 4.5	23.5	11	5.0 - 10.0	TPE	-	grey	500
22001PV02	16	1.5 - 4.5	23.5	11	5.0 - 10.0	TPE	UL94 V-0	white	500
22002PF019011	20	1.5 - 4.5	27.5	11	5.0 - 12.0	TPE	-	black	500
22002PF117035	20	1.5 - 4.5	27.5	11	5.0 - 12.0	TPE	-	grey	500
22002PV02	20	1.5 - 4.5	27.5	11	5.0 - 12.0	TPE	UL94 V-0	white	500
16465PF019011	23	1.5 - 4.5	32.5	11	10.0 - 14.0	TPE	-	black	500
16465PF117035	23	1.5 - 4.5	32.5	11	10.0 - 14.0	TPE	-	grey	500
16465PV02	23	1.5 - 4.5	32.5	11	10.0 - 14.0	TPE	UL94 V-0	white	500
22003PF019011	25	1.5 - 4.5	32.5	11	8.0 - 15.0	TPE	-	black	500
22003PF117035	25	1.5 - 4.5	32.5	11	8.0 - 15.0	TPE	-	grey	500
22003PV02	25	1.5 - 4.5	32.5	11	8.0 - 15.0	TPE	UL94 V-0	white	500
22004PF019011	32	1.5 - 4.5	44	15	14.0 - 20.0	TPE	-	black	400

Symbol	Mounting hole diameter	Panel thickness range	ØA	B	ØC	Material	Flammability	Color	Standard pack
	[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
22004PF117035	32	1.5 - 4.5	44	15	14.0 - 20.0	TPE	-	grey	400
22004PV02	32	1.5 - 4.5	44	15	14.0 - 20.0	TPE	UL94 V-0	white	400
22005PF019011	40	1.5 - 5.5	53	15	20.0 - 28.0	TPE	-	black	250
22005PF117035	40	1.5 - 5.5	53	15	20.0 - 28.0	TPE	-	grey	250
22005PV02	40	1.5 - 5.5	53	15	20.0 - 28.0	TPE	UL94 V-0	white	250
22006PF019011	50	1.5 - 5.5	65	21	27.0 - 35.0	TPE	-	black	150
22006PF117035	50	1.5 - 5.5	65	21	27.0 - 35.0	TPE	-	grey	150
22006PV02	50	1.5 - 5.5	65	21	27.0 - 35.0	TPE	UL94 V-0	white	150
22007PF019011	60	1.5 - 5.5	71	21	15.0 - 45.0	TPE	-	black	100
22007PF117035	60	1.5 - 5.5	71	21	15.0 - 45.0	TPE	-	grey	100
22007PV02	60	1.5 - 5.5	71	21	15.0 - 45.0	TPE	UL94 V-0	white	100
22008PF019011	80	1.5 - 5.5	93	25	20.0 - 60.0	TPE	-	black	50
22008PF117035	80	1.5 - 5.5	93	25	20.0 - 60.0	TPE	-	grey	50
22008PV02	80	1.5 - 5.5	93	25	20.0 - 60.0	TPE	UL94 V-0	white	50
16466PF019011	100	1.5 - 5.5	122	20	52.0 - 85.0	TPE	-	black	50
16466PF117035	100	1.5 - 5.5	122	20	52.0 - 85.0	TPE	-	grey	50
16466PV02	100	1.5 - 5.5	122	20	52.0 - 85.0	TPE	UL94 V-0	white	50
12266PF019011	120	1.5 - 6.0	142	26	70.0 - 100.0	TPE	-	black	20
12266PF117035	120	1.5 - 6.0	142	26	70.0 - 100.0	TPE	-	grey	20
12266PV02	120	1.5 - 6.0	142	26	70.0 - 100.0	TPE	UL94 V-0	white	20