


FP-22100 - Cable clamps

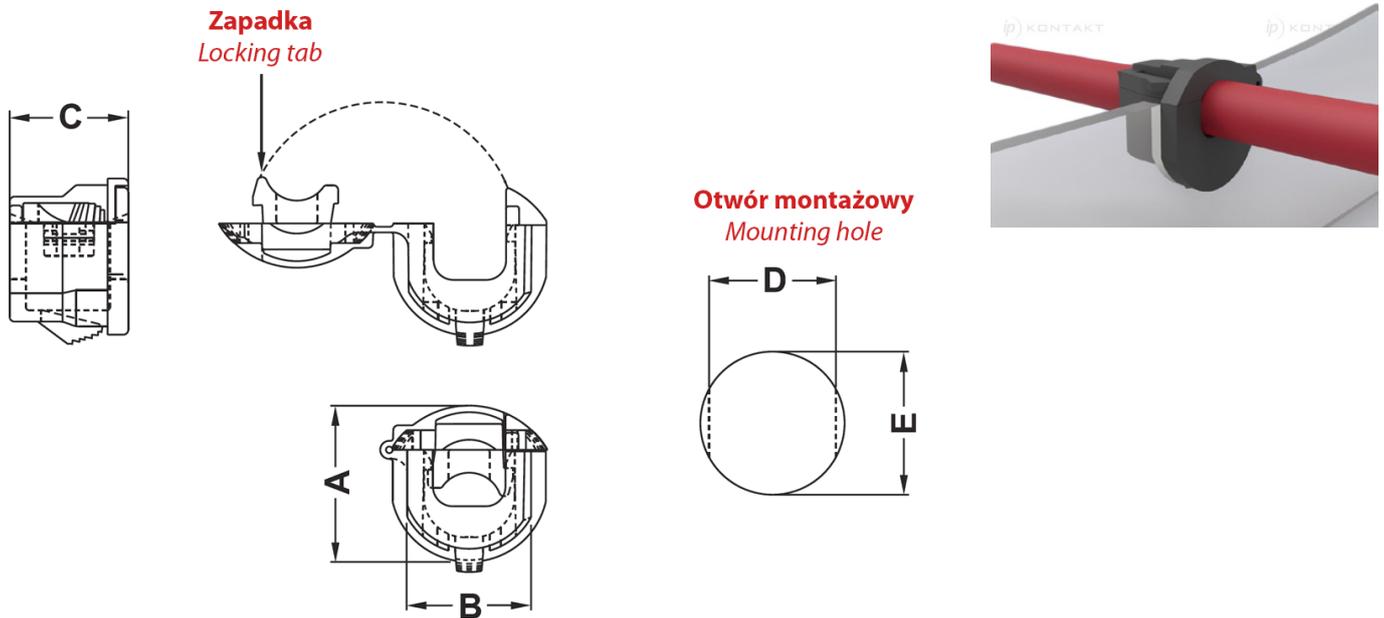

Details:

- **Material: PA 6.6**
- **Flammability: UL94 V-2**
- **Colour: black**
- Working temperature: -35°C to 85°C
- Standard pack: 1000 pcs

Symbol	A	B	C	D	E	Panel thickness range	Cable diameter range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
22100AA01	17.4	13.5	14	14	15.9	0.8 - 2.5	3.3 - 5.3	PA 66	UL94 V-2	black
22101AA01	17.4	13.5	14	14	15.9	0.8 - 2.5	5.6 - 7.4	PA 66	UL94 V-2	black
22103AA01	24.4	18.8	18.3	19.6	22.2	0.8 - 4.0	7.4 - 9.8	PA 66	UL94 V-2	black
22104AA01	24.4	18.8	18.3	19.6	22.2	2.0 - 3.4	7.4 - 9.8	PA 66	UL94 V-2	black
22105AA01	24.4	18.8	18.3	19.6	22.2	0.8 - 4.0	8.6 - 10.9	PA 66	UL94 V-2	black
22106AA01	24.4	18.8	18.3	19.6	22.2	2.0 - 3.4	8.6 - 10.9	PA 66	UL94 V-2	black
22107AA01	24.4	18.8	18.3	19.6	22.2	0.8 - 4.0	10.7 - 11.4	PA 66	UL94 V-2	black
22108AA01	24.4	18.8	18.3	19.6	22.2	2.0 - 3.4	10.7 - 11.4	PA 66	UL94 V-2	black
22109AA01	30.5	24.9	23.1	25.4	28.2	1.6 - 4.8	13.5 - 15.2	PA 66	UL94 V-2	black
22110AA01	33.8	24.9	31.8	25.4	28.2	1.6 - 4.8	15.2 - 17.8	PA 66	UL94 V-2	black