


FP-2460 - PCB spacers

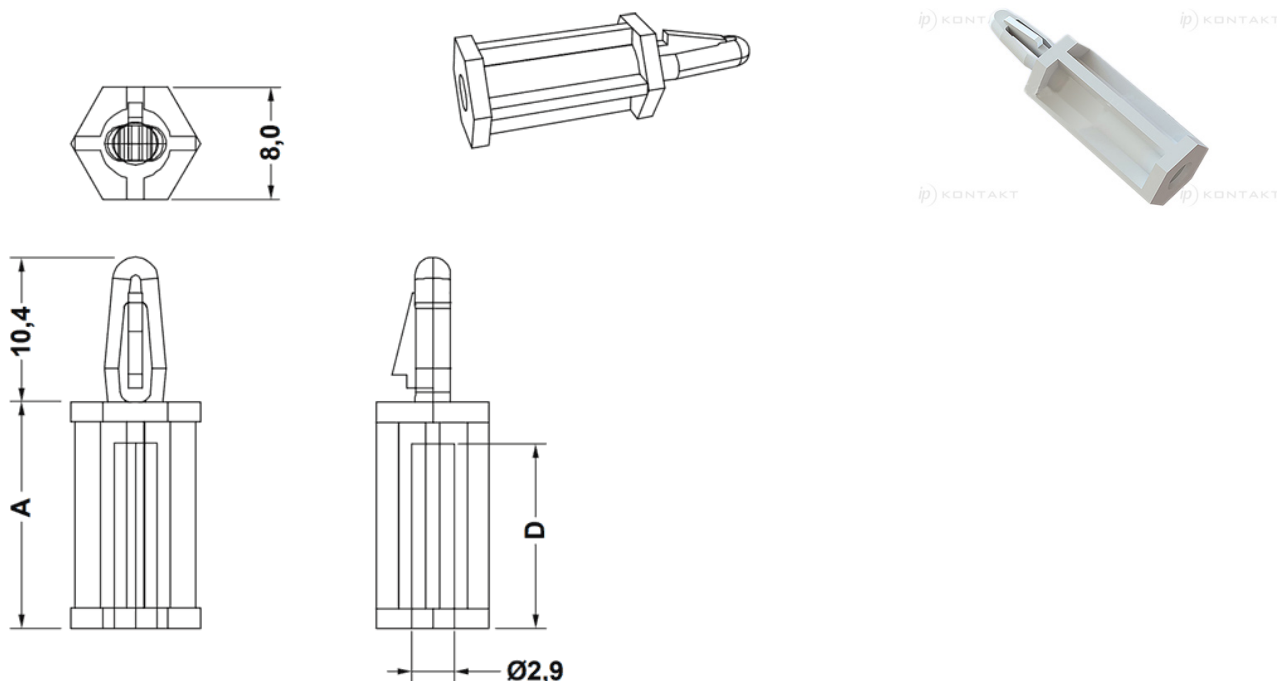

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Acrylic adhesive working temperature: -35°C up to +85°C

Symbol	Height A	D	Wrench size	Mounting hole diameter	Top panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
2460AA00	6.4	4.8	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2461AA00	9.6	8	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2462AA00	12.7	11	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2463AA00	16	13	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2464AA00	19.2	16.2	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2465AA00	22.4	19.4	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2466AA00	25.5	24	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural
2467AA00	29	25.9	8	4	1.2 - 1.7	PA 66	UL94 V-2	natural