


FP-3060 - PCB spacers

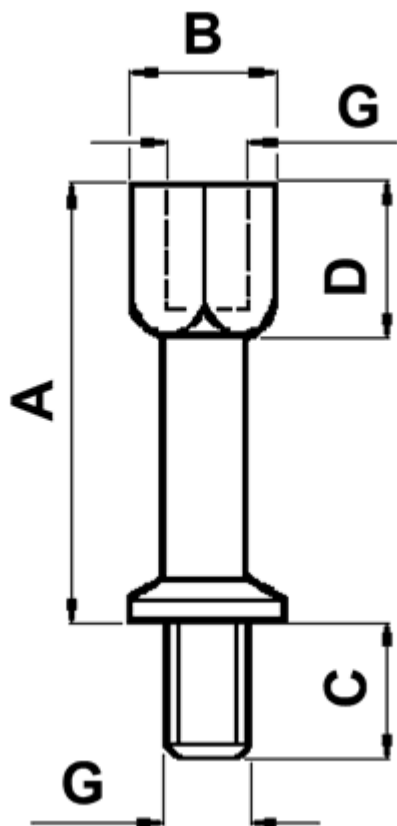

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Acrylic adhesive working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	Ext. thread length C	D	Int. thread G	Ext. thread G	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]					
3060AA00	10	5.5	5	6.7	M3x0.5	M3x0.5	PA 66	UL94 V-2	natural
3061AA00	15	5.5	5	6.7	M3x0.5	M3x0.5	PA 66	UL94 V-2	natural
3062AA00	20	5.5	5	6.7	M3x0.5	M3x0.5	PA 66	UL94 V-2	natural
3063AA00	25	5.5	5	6.7	M3x0.5	M3x0.5	PA 66	UL94 V-2	natural
3064AA00	30	5.5	5	6.7	M3x0.5	M3x0.5	PA 66	UL94 V-2	natural
1235AA00	10	7	5	6.5	M4x0.7	M4x0.7	PA 66	UL94 V-2	natural
1236AA00	15	7	5	6.5	M4x0.7	M4x0.7	PA 66	UL94 V-2	natural
1237AA00	20	7	5	6.5	M4x0.7	M4x0.7	PA 66	UL94 V-2	natural
1238AA00	25	7	5	6.5	M4x0.7	M4x0.7	PA 66	UL94 V-2	natural
1239AA00	30	7	5	6.5	M4x0.7	M4x0.7	PA 66	UL94 V-2	natural