
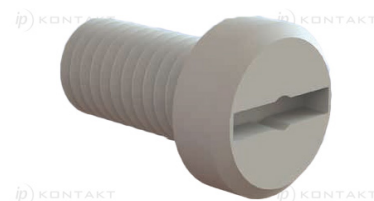


## FP-4003 - Plastic screw

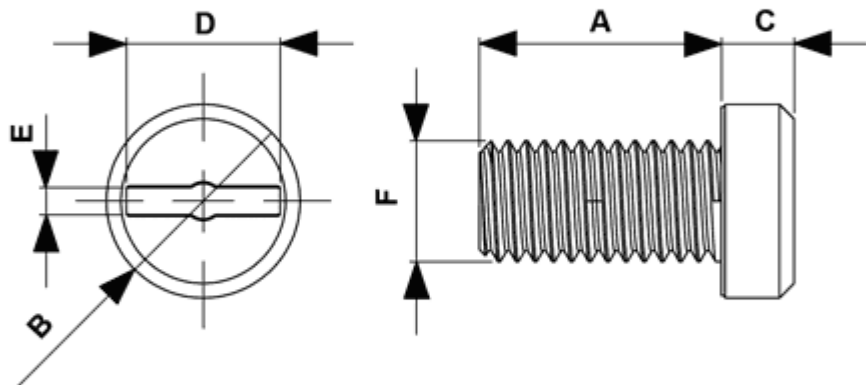

### Details:

- **Material:** PA 6.6
- **Flammability:** UL94V2
- **Color:** natural
- Working temperature: -35°C to +85°C
- Standard pack: 1000 pcs

| Symbol   | Thread length<br>A | Head diameter<br>B | Head height<br>C | D    | E    | Thread<br>F | Material | Flammability | Color   |
|----------|--------------------|--------------------|------------------|------|------|-------------|----------|--------------|---------|
|          | [mm]               | [mm]               | [mm]             | [mm] | [mm] |             |          |              |         |
| 4003AA00 | 6                  | 5.5                | 1.8              | 3.8  | 1    | M3          | PA 66    | UL94 V-2     | natural |
| 4004AA00 | 8                  | 5.5                | 1.8              | 3.8  | 1    | M3          | PA 66    | UL94 V-2     | natural |
| 4005AA00 | 10                 | 5.5                | 1.8              | 3.8  | 1    | M3          | PA 66    | UL94 V-2     | natural |
| 3118AA00 | 15                 | 5.5                | 1.8              | 3.8  | 1    | M3          | PA 66    | UL94 V-2     | natural |
| 3119AA00 | 20                 | 5.5                | 1.8              | 3.8  | 1    | M3          | PA 66    | UL94 V-2     | natural |
| 0559AA02 | 6                  | 5.5                | 1.8              | 3.8  | 0.8  | M4          | PA 66    | UL94 V-2     | natural |
| 4007AA02 | 8                  | 5.5                | 1.8              | 3.8  | 0.8  | M4          | PA 66    | UL94 V-2     | natural |
| 4008AA02 | 10                 | 5.5                | 1.8              | 3.8  | 0.8  | M4          | PA 66    | UL94 V-2     | natural |
| 0565AA00 | 10                 | 7                  | 2.8              | 5    | 1    | M4          | PA 66    | UL94 V-2     | natural |
| 0566AA00 | 15                 | 7                  | 2.8              | 5    | 1    | M4          | PA 66    | UL94 V-2     | natural |
| 0567AA00 | 20                 | 7                  | 2.8              | 5    | 1    | M4          | PA 66    | UL94 V-2     | natural |
| 3130AA00 | 25                 | 7                  | 2.8              | 5    | 1    | M4          | PA 66    | UL94 V-2     | natural |
| 3131AA00 | 30                 | 7                  | 2.8              | 5    | 1    | M4          | PA 66    | UL94 V-2     | natural |
| 3132AA00 | 35                 | 7                  | 2.8              | 5    | 1    | M4          | PA 66    | UL94 V-2     | natural |
| 0576AA00 | 10                 | 8.5                | 3.3              | 6    | 1.4  | M5          | PA 66    | UL94 V-2     | natural |

| Symbol   | Thread length<br>A | Head diameter<br>B | Head height<br>C | D    | E    | Thread<br>F | Material | Flammability | Color   |
|----------|--------------------|--------------------|------------------|------|------|-------------|----------|--------------|---------|
|          | [mm]               | [mm]               | [mm]             | [mm] | [mm] |             |          |              |         |
| 0577AA00 | 15                 | 8.5                | 3.3              | 6    | 1.4  | M5          | PA 66    | UL94 V-2     | natural |
| 0578AA00 | 20                 | 8.5                | 3.3              | 6    | 1.4  | M5          | PA 66    | UL94 V-2     | natural |
| 3121AA00 | 25                 | 8.5                | 3.3              | 6    | 1.4  | M5          | PA 66    | UL94 V-2     | natural |
| 3122AA00 | 30                 | 8.5                | 3.3              | 6    | 1.4  | M5          | PA 66    | UL94 V-2     | natural |
| 3123AA00 | 35                 | 8.5                | 3.3              | 6    | 1.4  | M5          | PA 66    | UL94 V-2     | natural |
| 3133AA00 | 7                  | 10                 | 4.1              | 7    | 1.6  | M6          | PA 66    | UL94 V-2     | natural |
| 3134AA00 | 12                 | 10                 | 4.1              | 7    | 1.6  | M6          | PA 66    | UL94 V-2     | natural |
| 0530AA00 | 20                 | 10                 | 4.1              | 7    | 1.6  | M6          | PA 66    | UL94 V-2     | natural |
| 3135AA00 | 25                 | 10                 | 4.1              | 7    | 1.6  | M6          | PA 66    | UL94 V-2     | natural |
| 3136AA00 | 30                 | 10                 | 4.1              | 7    | 1.6  | M6          | PA 66    | UL94 V-2     | natural |
| 3124AA00 | 15                 | 13                 | 5                | 10   | 2    | M8          | PA 66    | UL94 V-2     | natural |
| 3125AA00 | 20                 | 13                 | 5                | 10   | 2    | M8          | PA 66    | UL94 V-2     | natural |
| 3126AA00 | 25                 | 13                 | 5                | 10   | 2    | M8          | PA 66    | UL94 V-2     | natural |
| 3127AA00 | 30                 | 13                 | 5                | 10   | 2    | M8          | PA 66    | UL94 V-2     | natural |
| 3128AA00 | 35                 | 13                 | 5                | 10   | 2    | M8          | PA 66    | UL94 V-2     | natural |
| 3137AA00 | 20                 | 16                 | 6                | 12.7 | 2.2  | M10         | PA 66    | UL94 V-2     | natural |
| 3138AA00 | 25                 | 16                 | 6                | 12.7 | 2.2  | M10         | PA 66    | UL94 V-2     | natural |
| 3139AA00 | 30                 | 16                 | 6                | 12.7 | 2.2  | M10         | PA 66    | UL94 V-2     | natural |
| 3140AA00 | 35                 | 16                 | 6                | 12.7 | 2.2  | M10         | PA 66    | UL94 V-2     | natural |