


FP-4745 - PCB spacers

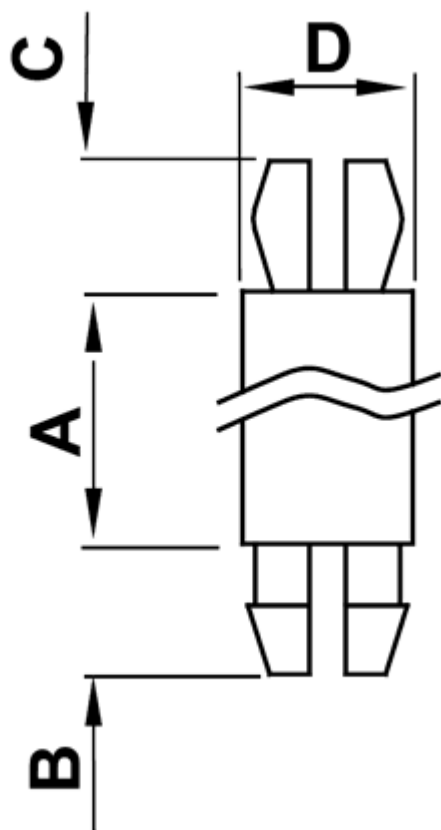

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
4745AA00	3.2	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4746AA00	4.8	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4747AA00	6.3	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4748AA00	7.9	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4749AA00	9.4	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4750AA00	11.3	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4751AA00	12.7	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4752AA00	15.9	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4753AA00	19.1	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
4754AA00	22.2	3.6	3.6	5	4	1.6 - 1.75	PA 66	UL94 V-2	natural
6145AA00	3.2	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6146AA00	4.8	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6147AA00	6.4	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6148AA00	7.9	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6149AA00	9.5	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural

Symbol	Height A	B	C	D	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6150AA00	11.1	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6151AA00	12.7	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6152AA00	14.3	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6153AA00	15.9	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6155AA00	17.5	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6156AA00	19.1	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6157AA00	20.6	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6159AA00	22.2	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6160AA00	25.4	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6161AA00	28.5	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6162AA00	31.7	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6164AA00	34.9	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural
6165AA00	38.1	3.6	3.8	4.4	3.2	1.6	PA 66	UL94 V-2	natural