


FP-5306 - PCB spacers

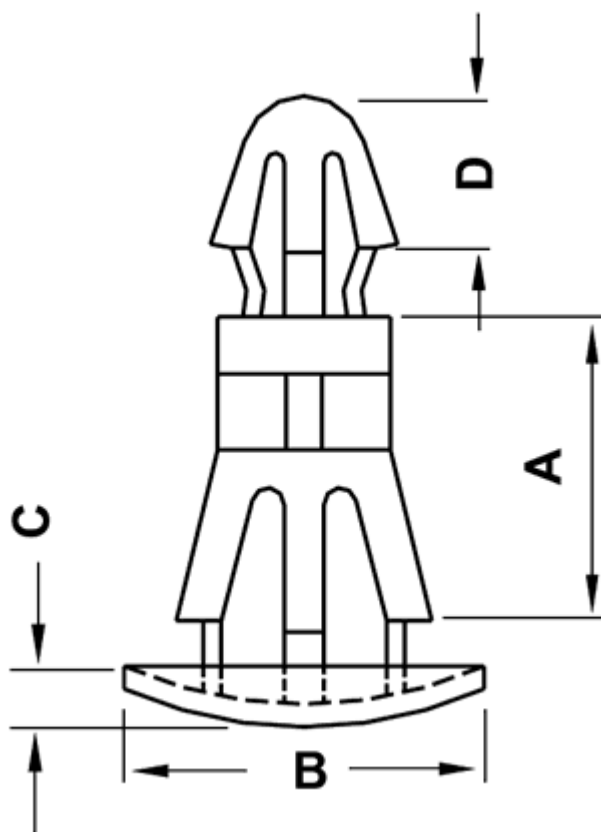

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
5306AA00	6	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5307AA00	7	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5308AA00	8	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5309AA00	10	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5310AA00	12	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5311AA00	14	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5312AA00	16	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural
5313AA00	18	10	1.8	4	4	1.2 - 1.7	5.5	1.2 - 1.8	PA 66	UL94 V-2	natural