


FP-5659 - Clips

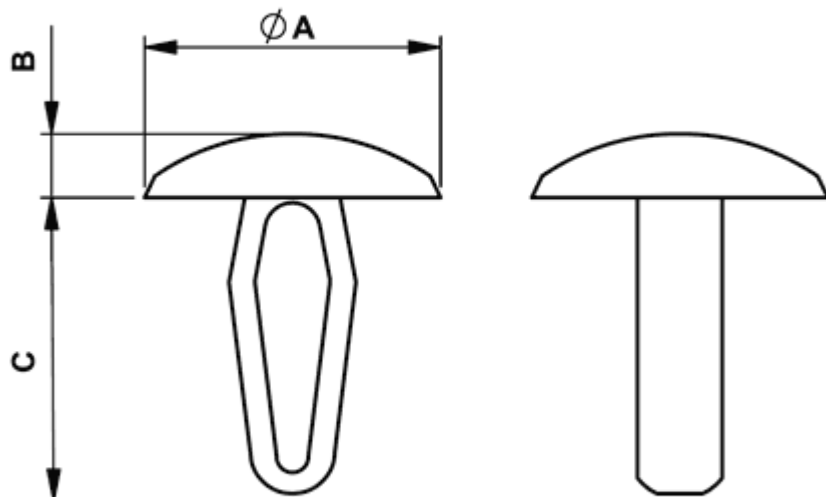

Details:

- **Material:** Nylon 6.6
- **Flammability:** UL94V2
- **Color:** natural (NAT) or black (BLK)
- **Working temperature:** -35°C do +85°C

Symbol	Head diameter ØA	Head height B	C	Mounting hole diameter	Panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
5659AA00	6.9	1	8.4	3.2	2.0 - 2.5	2000	PA 66	UL94 V-2	natural
5659AA01	6.9	1	8.4	3.2	2.0 - 2.5	2000	PA 66	UL94 V-2	black
0278AA00	9.5	1.5	11	5	1.5 - 3.5	2500	PA 66	UL94 V-2	natural
0278AA01	9.5	1.5	11	5	1.5 - 3.5	2500	PA 66	UL94 V-2	black
0281AA00	9.5	1.5	11	7	1.5 - 2.0	2500	PA 66	UL94 V-2	natural
0281AA01	9.5	1.5	11	7	1.5 - 2.0	2500	PA 66	UL94 V-2	black
0096AA00	6.5	1	12	3.5	1.0 - 3.0	5000	PA 66	UL94 V-2	natural
0096AA01	6.5	1	12	3.5	1.0 - 3.0	5000	PA 66	UL94 V-2	black
0277AA00	7.5	2	13.5	3.5	2.5 - 6.5	2500	PA 66	UL94 V-2	natural
0277AA01	7.5	2	13.5	3.5	2.5 - 6.5	2500	PA 66	UL94 V-2	black
2332AA00	13	1.5	16	6.5	0.8 - 6.0	2500	PA 66	UL94 V-2	natural
2332AA01	13	1.5	16	6.5	0.8 - 6.0	2500	PA 66	UL94 V-2	black