


FP-5660 - Threaded spacer F-F

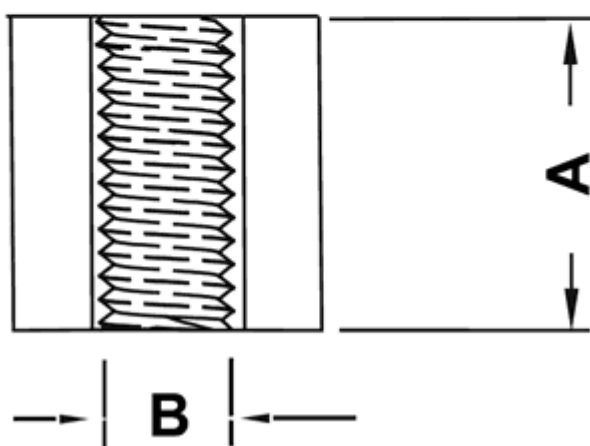

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C do +85°C
- M3 through hole up to 12.0 mm length. Higher lengths have 6 mm thread minimum depth on each side
- M4 through hole up to 12.7 mm length. Higher lengths have 6 mm thread minimum depth on each side

Symbol	Height A	Int. thread B	Int. thread length	Wrench size C	Material	Color	Flammability	Standard pack
	[mm]		[mm]	[mm]				[szt./pcs]
5660AA00	4	M3x0.5	4	5.5	PA 66	natural	UL94 V-2	1000
5661AA00	5	M3x0.5	5	5.5	PA 66	natural	UL94 V-2	1000
5662AA00	6	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5663AA00	7	M3x0.5	7	5.5	PA 66	natural	UL94 V-2	1000
5664AA00	8	M3x0.5	8	5.5	PA 66	natural	UL94 V-2	1000
5665AA00	9	M3x0.5	9	5.5	PA 66	natural	UL94 V-2	1000
5666AA00	9.5	M3x0.5	9.5	5.5	PA 66	natural	UL94 V-2	1000
5667AA00	10	M3x0.5	10	5.5	PA 66	natural	UL94 V-2	1000
5668AA00	10.5	M3x0.5	10.5	5.5	PA 66	natural	UL94 V-2	1000
5669AA00	11	M3x0.5	11	5.5	PA 66	natural	UL94 V-2	1000
5670AA00	12	M3x0.5	12	5.5	PA 66	natural	UL94 V-2	1000
5671AA00	12.7	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5672AA00	13.5	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5673AA00	14	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5674AA00	15	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000

Symbol	Height A	Int. thread B	Int. thread length	Wrench size C	Material	Color	Flammability	Standard pack
	[mm]		[mm]	[mm]				[szt./pcs]
5675AA00	16	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5676AA00	17	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5677AA00	18	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5678AA00	19	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5679AA00	20	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5680AA00	22	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5681AA00	25	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5682AA00	27	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5683AA00	30	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5684AA00	32	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	1000
5685AA00	38	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	500
5686AA00	40	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	500
5687AA00	42	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	500
5689AA00	45	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	500
5690AA00	49	M3x0.5	6	5.5	PA 66	natural	UL94 V-2	500
6281AA00	6	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6282AA00	7	M4x0.7	7	7	PA 66	natural	UL94 V-2	1000
6283AA00	8	M4x0.7	8	7	PA 66	natural	UL94 V-2	1000
6284AA00	9	M4x0.7	9	7	PA 66	natural	UL94 V-2	1000
5722AA00	10	M4x0.7	10	7	PA 66	natural	UL94 V-2	1000
6285AA00	11	M4x0.7	11	7	PA 66	natural	UL94 V-2	1000
6286AA00	12	M4x0.7	12	7	PA 66	natural	UL94 V-2	1000
6287AA00	12.7	M4x0.7	12.7	7	PA 66	natural	UL94 V-2	1000
6288AA00	14	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6289AA00	16	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6290AA00	20	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6291AA00	25	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6292AA00	26	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6293AA00	30	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6294AA00	35	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6295AA00	40	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000
6296AA00	45.5	M4x0.7	6	7	PA 66	natural	UL94 V-2	1000