


IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

FP-5800 - Snap cable bushing



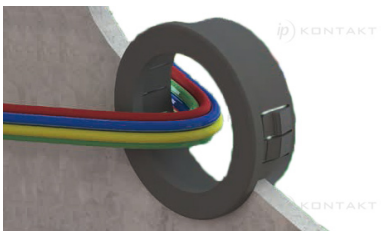

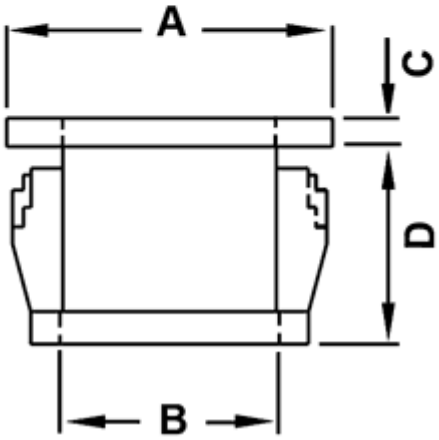

Details:

- **Material: Nylon 6.6 UL94V2**
- **Color: black**
- Working temperature: -35°C to +85°C
- Parts may appear with one or two fixing hooks per side

Symbol	A	B	C	D	Mounting hole diameter range	Panel thickness	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
5800AA01	7.9	3.2	1.6	6.3	6.4	1	5000	PA 66	UL94 V-2	black
5801AA01	7.9	3.2	1.6	6.3	6.4	1.6	1000	PA 66	UL94 V-2	black
5802AA01	9.5	4.8	1.6	6.3	7.9	1.6	2500	PA 66	UL94 V-2	black
5803AA01	11.9	4.8	1.6	8.7	9.5	3.2	1000	PA 66	UL94 V-2	black
5804AA01	11.9	6.4	1.6	8.7	9.5	3.2	1000	PA 66	UL94 V-2	black
5805AA01	11.9	7.1	1.6	8.7	9.5	4.3	1000	PA 66	UL94 V-2	black
5806AA01	13.5	6.4	1.6	8.7	11.1	3.2	7500	PA 66	UL94 V-2	black
5807AA01	13.5	7.9	1.6	8.7	11.1	3.2	1000	PA 66	UL94 V-2	black
5808AA01	13.5	6.2	1.6	8.7	11.1	3.2	7500	PA 66	UL94 V-2	black
5809AA01	14.7	6.4	1.6	8.7	12.7	3.2	7500	PA 66	UL94 V-2	black
5810AA01	14.7	7.9	1.6	8.7	12.7	3.2	1000	PA 66	UL94 V-2	black
5811AA01	14.7	9.5	1.6	8.7	12.7	3.2	1000	PA 66	UL94 V-2	black
5812AA01	16.7	7.9	1.6	8.7	14.3	3.2	1000	PA 66	UL94 V-2	black
5813AA01	16.7	9.5	1.6	8.7	14.3	3.2	1000	PA 66	UL94 V-2	black
5814AA01	16.7	11.1	1.6	8.7	14.3	3.2	1000	PA 66	UL94 V-2	black
5816AA01	18.2	11.1	1.6	8.7	15.9	3.2	1000	PA 66	UL94 V-2	black

Symbol	A	B	C	D	Mounting hole diameter range	Panel thickness	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
5817AA01	18.2	12.7	1.6	8.7	15.9	3.2	1000	PA 66	UL94 V-2	black
5818AA01	17.9	12.7	1.6	11.9	15.9	6.4	10000	PA 66	UL94 V-2	black
5819AA01	19.8	12.7	1.6	8.7	17.4	3.2	1000	PA 66	UL94 V-2	black
5820AA01	19.8	14.3	1.6	8.7	17.4	3.2	1000	PA 66	UL94 V-2	black
5821AA01	21.4	9.5	1.6	8.7	19.1	3.2	5000	PA 66	UL94 V-2	black
5822AA01	21.4	12.7	1.6	8.7	19.1	3.2	5000	PA 66	UL94 V-2	black
5823AA01	21.4	14.3	1.6	8.7	19.1	3.2	500	PA 66	UL94 V-2	black
5824AA01	21.4	15.5	1.6	8.7	19.1	3.2	500	PA 66	UL94 V-2	black
5825AA01	21	15.9	1.6	11.9	19.1	6.4	7500	PA 66	UL94 V-2	black
5826AA01	22.6	14.3	1.6	8.7	20.6	3.2	500	PA 66	UL94 V-2	black
5827AA01	22.6	15.9	1.6	8.7	20.6	3.2	500	PA 66	UL94 V-2	black
5833AA01	24.2	17.5	1.6	9.9	22.2	3.2	500	PA 66	UL94 V-2	black
5834AA01	28.6	19.1	1.6	9.9	25.5	3.2	500	PA 66	UL94 V-2	black
5835AA01	30.9	20.6	1.6	9.9	27.8 - 28.6	3.2	500	PA 66	UL94 V-2	black
5836AA01	30.9	22.2	1.6	9.9	27.8 - 28.6	3.2	500	PA 66	UL94 V-2	black
5837AA01	30.9	23.8	1.6	9.9	27.8 - 28.6	3.2	500	PA 66	UL94 V-2	black
5838AA01	33.3	23.8	1.6	9.9	30.1	3.2	500	PA 66	UL94 V-2	black
5839AA01	34.5	23.8	1.6	9.9	31.8	3.2	500	PA 66	UL94 V-2	black
5840AA01	34.5	25.5	1.6	9.9	31.8	3.2	500	PA 66	UL94 V-2	black
5841AA01	37.3	22.2	1.6	9.9	34.9	3.2	500	PA 66	UL94 V-2	black
5842AA01	37.3	25.5	1.6	99	34.9	3.2	500	PA 66	UL94 V-2	black
5843AA01	40.9	27	1.6	9.9	38.1	3.2	500	PA 66	UL94 V-2	black
5844AA01	40.9	28.5	1.6	9.9	38.1	3.2	500	PA 66	UL94 V-2	black
5845AA01	40.9	33.3	1.6	9.9	38.1	3.2	500	PA 66	UL94 V-2	black
5846AA01	47.6	35	1.6	9.9	44.5	3.2	500	PA 66	UL94 V-2	black
5847AA01	54	41.3	1.6	9.9	50.8	3.2	500	PA 66	UL94 V-2	black
5848AA01	63.1	47.1	1.6	16.7	57.2	6.4	500	PA 66	UL94 V-2	black
5849AA01	67.5	50	1.6	16.7	63.5	6.4	500	PA 66	UL94 V-2	black
5850AA01	80.2	61.9	1.6	16.7	76.2	6.4	500	PA 66	UL94 V-2	black
5851AA01	92.8	74.6	1.6	16.7	88.9	6.4	500	PA 66	UL94 V-2	black
5852AA01	105.6	87.3	1.6	16.7	101.6	6.4	500	PA 66	UL94 V-2	black