


IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

FP-5890 - Snap cable bushing

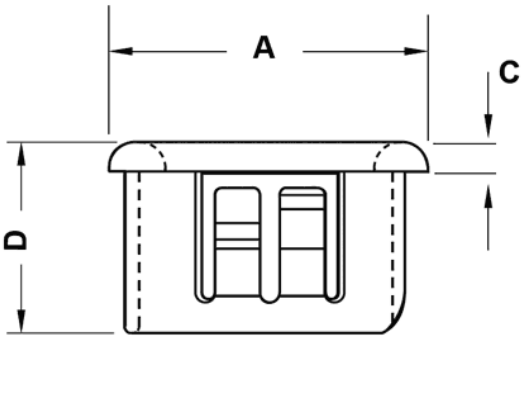

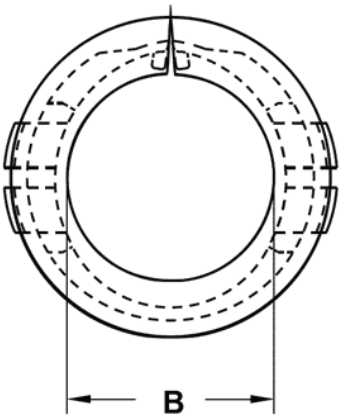

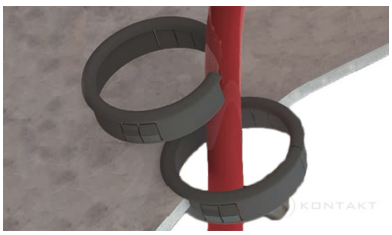

Details:

- **Material: Nylon 6.6 UL94V2**
- **Color: black**
- Working temperature: -35°C to +85°C
- Parts may appear with one or two fixing hooks per side

Symbol	Ext. diameter A	Int. diameter B	C	Height D	Mounting hole diameter	Panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
5890AA01	10.7	6.7	1.1	9.9	9.5	0.8 - 3.2	1000	PA 66	UL94 V-2	black
5891AA01	12.3	7.9	1.6	10.3	11.1	0.8 - 3.2	1000	PA 66	UL94 V-2	black
5892AA01	14.3	7.9	1.6	10.3	12.7	0.8 - 3.2	1000	PA 66	UL94 V-2	black
5893AA01	16.3	9.9	1.6	10.3	14.3	0.8 - 3.2	1000	PA 66	UL94 V-2	black
5894AA01	17.5	11.5	1.6	10.3	15.9	0.8 - 3.2	500	PA 66	UL94 V-2	black
5895AA01	20.2	13.9	1.6	10.3	19	0.8 - 3.2	500	PA 66	UL94 V-2	black
5896AA01	23.4	17.1	1.6	10.3	22.2	0.8 - 3.2	500	PA 66	UL94 V-2	black
5897AA01	27	20.2	1.6	10.3	25.4	0.8 - 3.2	500	PA 66	UL94 V-2	black
5898AA01	28.6	22	1.6	10.3	27.8	0.8 - 3.2	500	PA 66	UL94 V-2	black
5899AA01	34.1	26.6	1.6	10.3	31.8	0.8 - 3.2	500	PA 66	UL94 V-2	black
5900AA01	37.3	29.8	1.6	10.3	34.9	0.8 - 3.2	500	PA 66	UL94 V-2	black
5901AA01	40.1	31.7	2	10.7	38.1	0.8 - 3.2	500	PA 66	UL94 V-2	black
6761AA01	12.4	7.6	1.6	6	9.5	0.8 - 1.6	1000	PA 66	UL94 V-2	black
6753AA01	15	9.7	1.6	9.8	12.7	0.8 - 3.3	1000	PA 66	UL94 V-2	black
6762AA01	16.8	10.8	1.6	7.3	12.7	0.8 - 1.6	1000	PA 66	UL94 V-2	black
6754AA01	18.4	12.8	1.6	10.4	15.9	0.8 - 3.3	1000	PA 66	UL94 V-2	black
6763AA01	20.3	14.1	1.6	7.3	15.9	0.8 - 1.6	1000	PA 66	UL94 V-2	black
6755AA01	20.7	15.1	1.6	10.4	19	0.8 - 3.3	1000	PA 66	UL94 V-2	black
6764AA01	22.5	16.5	1.6	7.3	19	0.8 - 1.6	1000	PA 66	UL94 V-2	black
6765AA01	26	20	1.6	7.3	22	0.8 - 1.6	1000	PA 66	UL94 V-2	black
6766AA01	28.6	22	1.6	7.9	25.4	0.8 - 1.6	1000	PA 66	UL94 V-2	black