


FP-5905 - PCB spacers

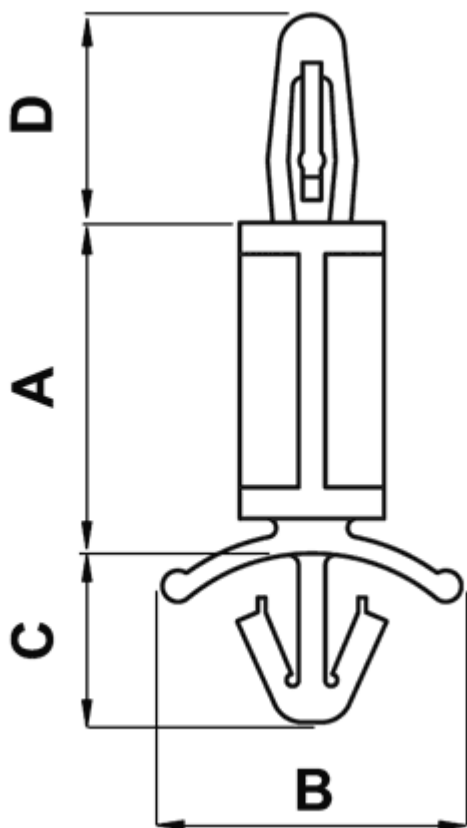

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C

Symbol	Height A	B	C	D	Bottom mounting hole dia.	Bottom panel thickness range	Top mounting hole dia.	Top panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
5905AA00	3.5	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5906AA00	4.8	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5590AA00	4.8	13	8.5	10.2	4.8	2.0 - 3.2	4	1.6	1000	PA 66	UL94 V-2	natural
5591AA00	4.8	13	8.5	10.2	4.8	2.0 - 3.2	4	2.0 - 3.2	1000	PA 66	UL94 V-2	natural
5502AA00	6.4	13.4	8.2	10	4.8	0.5 - 2.0	4	1.4 - 1.8	2000	PA 66	UL94 V-2	natural
5907AA00	7.9	14	7.5	10.2	4.8	0.8 - 2.0	4	1.2 - 1.7	1000	PA 66	UL94 V-2	natural
0367AA00	8.3	14	8.2	9.5	4.8	0.5 - 2.0	4	1.4 - 1.8	2500	PA 66	UL94 V-2	natural
5504AA00	9.5	14.5	8.2	10	4.8	0.5 - 2.0	4	1.4 - 1.8	2000	PA 66	UL94 V-2	natural
5505AA00	11.1	14.5	8.2	10	4.8	0.5 - 2.0	4	1.4 - 1.8	2000	PA 66	UL94 V-2	natural
5506AA00	12.7	14.5	8.2	10	4.8	0.5 - 2.0	4	1.4 - 1.8	2000	PA 66	UL94 V-2	natural
0368AA00	13.5	14	8.2	9.5	4.8	0.5 - 2.0	4	1.4 - 1.8	2500	PA 66	UL94 V-2	natural
5507AA00	15.9	14.5	8.2	10	4.8	0.5 - 2.0	4	1.4 - 1.8	2000	PA 66	UL94 V-2	natural
0369AA00	18.1	14	8.2	9.5	4.8	0.5 - 2.0	4	1.4 - 1.8	2500	PA 66	UL94 V-2	natural
5902AA00	19.1	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5903AA00	22.2	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural

Symbol	Height A	B	C	D	Bottom mounting hole dia.	Bottom panel thickness range	Top mounting hole dia.	Top panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
5904AA00	24	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5908AA00	25.4	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5909AA00	28.6	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5910AA00	31.7	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural
5911AA00	34.9	14	7.5	10.2	4.8	0.8 - 2.0	4	1.6	1000	PA 66	UL94 V-2	natural