


FP-6012 - Self-adhesive PCB spacers

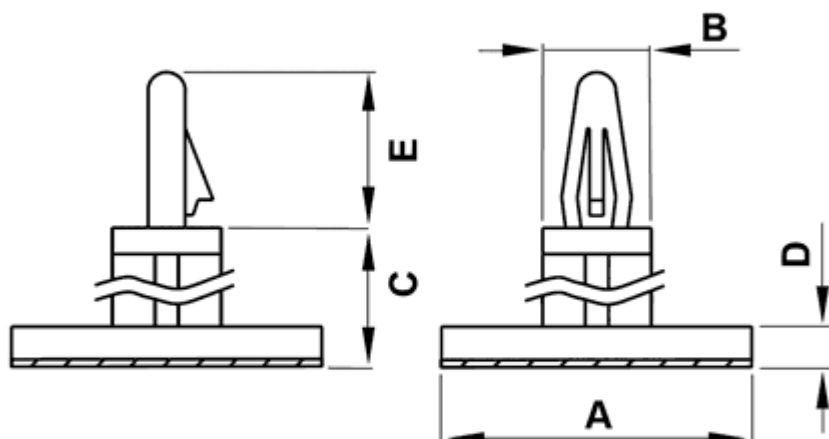

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Acrylic adhesive working temperature: -20°C up to +80°C

Symbol	Base width A	B	Height C	D	E	Top mounting hole dia.	Top panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6012AA00AS	12.5	4.3	4.8	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
6013AA00AS	12.5	4.3	6.4	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
8136AA00AS	12.5	4.3	7.9	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
6014AA00AS	12.5	4.3	8.4	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
8137AA00AS	12.5	4.3	9.5	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
8138AA00AS	12.5	4.3	11.4	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
8139AA00AS	12.5	4.3	12.7	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
6015AA00AS	12.5	4.3	15.9	-	8.7	3.2	1.6	PA 66	UL94 V-2	natural
6166AA00AS	20	7	5.5	2.9	10	4	1.2 - 1.7	PA 66	UL94 V-2	natural
6167AA00AS	20	7	6.7	2.9	10	4	1.2 - 1.7	PA 66	UL94 V-2	natural
6168AA00AS	20	7	8.2	2.9	10	4	1.2 - 1.7	PA 66	UL94 V-2	natural
6169AA00AS	20	7	10	2.9	10	4	1.2 - 1.7	PA 66	UL94 V-2	natural
6170AA00AS	20	7	13.2	2.9	10	4	1.2 - 1.7	PA 66	UL94 V-2	natural
6171AA00AS	20	7	16.2	2.9	10	4	1.2 - 1.7	PA 66	UL94 V-2	natural