


FP-6020 - PCB spacers

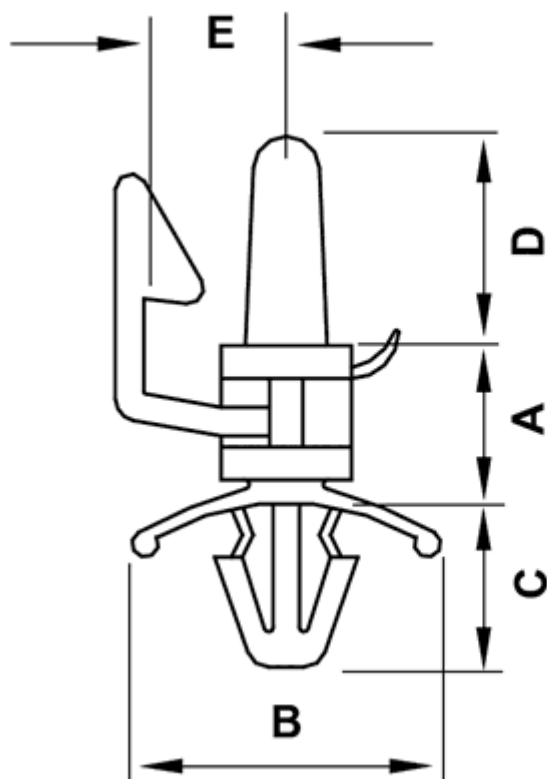

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	E	Bottom mounting hole dia.	Bottom panel thickness range	Top mounting hole dia.	Top panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6020AA00	6.3	14	7.5	9.5	6.3	4.8	0.5 - 2.0	4	1.6 - 1.8	PA 66	UL94 V-2	natural
6021AA00	8	14	7.5	9.5	6.3	4.8	0.5 - 2.0	4	1.6 - 1.8	PA 66	UL94 V-2	natural
6022AA00	9.5	14	7.5	9.5	6.3	4.8	0.5 - 2.0	4	1.6 - 1.8	PA 66	UL94 V-2	natural
6023AA00	12.7	14	7.5	9.5	6.3	4.8	0.5 - 2.0	4	1.6 - 1.8	PA 66	UL94 V-2	natural
6024AA00	15.9	14	7.5	9.5	6.3	4.8	0.5 - 2.0	4	1.6 - 1.8	PA 66	UL94 V-2	natural