


FP-6031 - PCB spacers

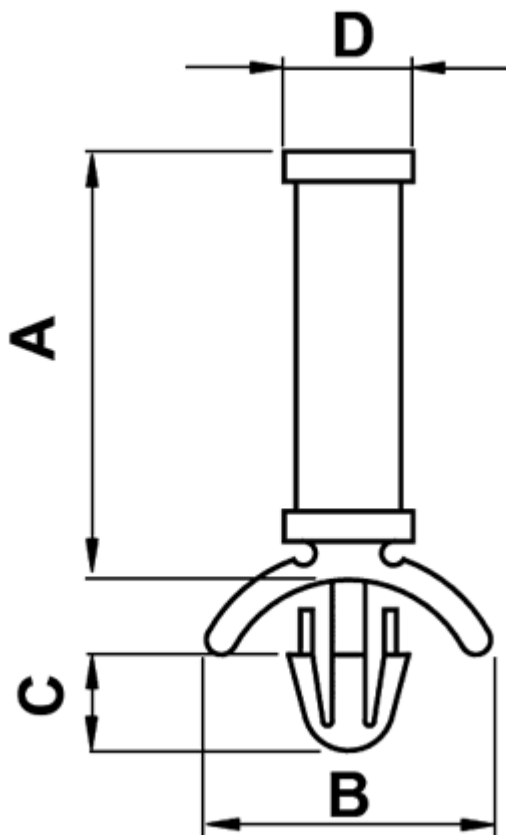

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Mounting hole diameter	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6031AA00	3.2	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6032AA00	4.8	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6033AA00	6.4	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6034AA00	7.9	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6280AA00	9.5	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6036AA00	12.7	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6037AA00	14.3	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6038AA00	15.9	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural
6039AA00	19	9.5	3.2	4.4	3	0.8 - 2	PA 66	UL94 V-2	natural