


FP-6048 - Reverse locking PCB spacers with round head

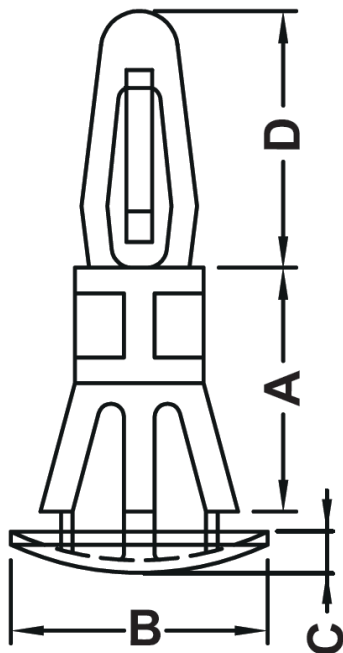

Details:

- **Material:** Nylon 6.6
- **Colour:** Natural
- Flammability: UL94 V-2
- Working temperature: -35°C ~ +85°C
- Top hole: 4±0.08mm, Top panel thickness: 1.6mm
- Bottom hole: 6±0.08mm, Bottom panel thickness: 0.8 - 1.2mm

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6048AA0004.80	4.8	10	1.5	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-2	natural
6049AA0006.40	6.4	10	1.5	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-2	natural
6049AA0008.00	8	10	1.5	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-2	natural
6049AA0009.50	9.5	10	1.5	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-2	natural
6049AA0012.70	12.7	10	1.5	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-2	natural
6049AA0019.00	19	10	1.5	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-2	natural