


FP-6067 - PCB spacers

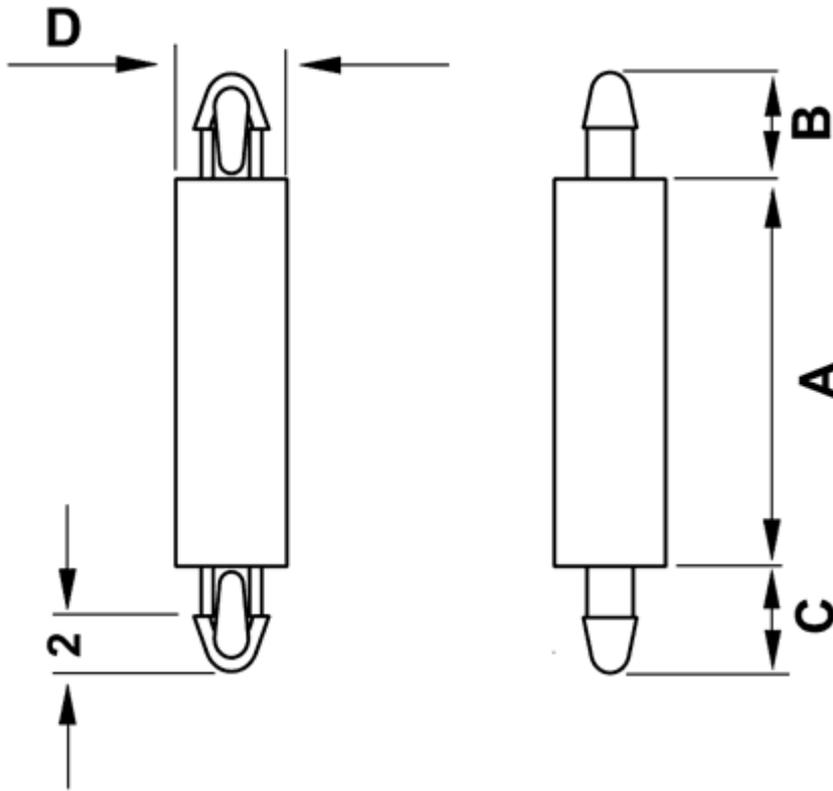

Details:

- **Material: Nylon 6.6**
- **Color: natural**
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 2000 pcs

Symbol	Height A	B	C	D	Mounting hole diameter	Panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]					
6067AA00	2	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6068AA00	3	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6069AA00	4	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6070AA00	5	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6071AA00	6	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6072AA00	7	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6073AA00	8	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6074AA00	8.5	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6075AA00	9	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6076AA00	10	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6077AA00	12	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6078AA00	14	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6079AA00	16	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6080AA00	18	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural
6081AA00	20	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural

Symbol	Height A	B	C	D	Mounting hole diameter	Panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6082AA00	22	3.8	3.8	4.6	2.5	1.6	PA 66	UL94 V-2	natural