


## FP-6120 - PCB spacers

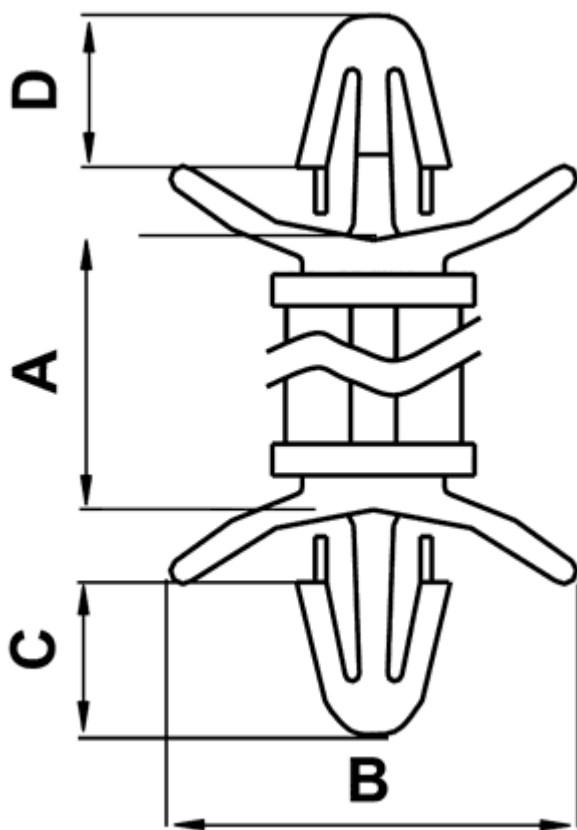

### Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

| Symbol   | Height<br>A | B    | C    | D    | Mounting hole diameter | Panel thickness range | Material | Flammability | Color   |
|----------|-------------|------|------|------|------------------------|-----------------------|----------|--------------|---------|
|          | [mm]        | [mm] | [mm] | [mm] | [mm]                   | [mm]                  |          |              |         |
| 6120AA00 | 4.8         | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |
| 6121AA00 | 6.4         | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |
| 6122AA00 | 9.5         | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |
| 6123AA00 | 12.7        | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |
| 6124AA00 | 15.9        | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |
| 6125AA00 | 19          | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |
| 6126AA00 | 22.2        | 14.2 | 5.5  | 5.5  | 4                      | 0.8 - 2.0             | PA 66    | UL94 V-2     | natural |