


FP-6127 - PCB spacers

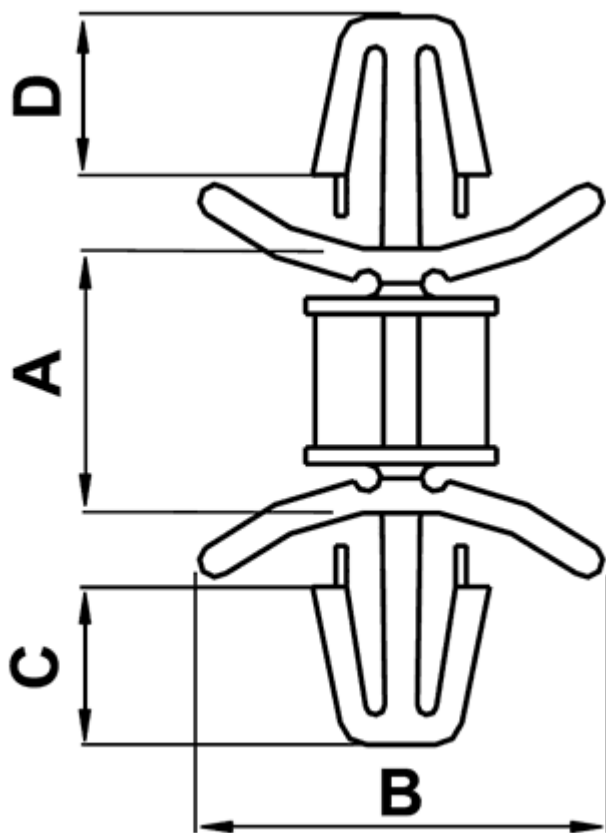

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Mounting hole diameter	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6127AA00	4.8	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
6128AA00	6.4	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
6129AA00	9.5	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
6130AA00	12.7	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
6131AA00	15.9	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
6132AA00	19.1	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural
6133AA00	22.2	14.8	5.8	5.8	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural