


FP-6210 - PCB spacers

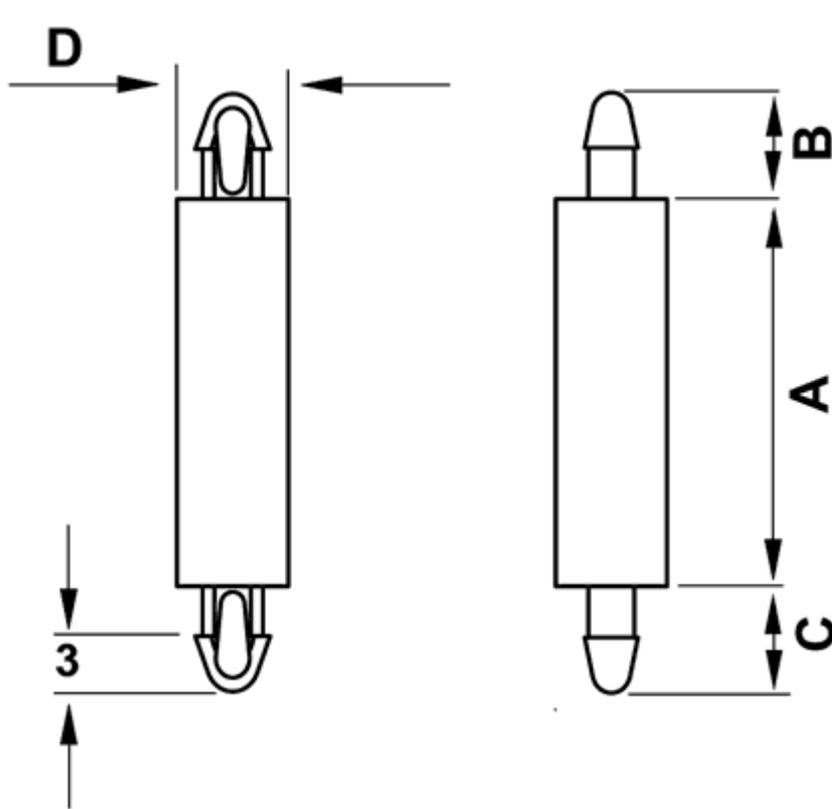

Details:

- **Material: Nylon 6.6**
- **Color: natural**
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	D	Mounting hole diameter	Panel thickness	Material	Flammability	Color
	[mm]								
6210AA00	2	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6211AA00	3	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6212AA00	4	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6213AA00	5	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6214AA00	6	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6215AA00	7	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6216AA00	8	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6217AA00	10	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6218AA00	12	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6219AA00	14	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6220AA00	16	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6221AA00	18	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6222AA00	20	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural
6223AA00	22	4.8	4.8	4.5	3.5	1.6	PA 66	UL94 V-2	natural