


FP-6252 - PCB spacers

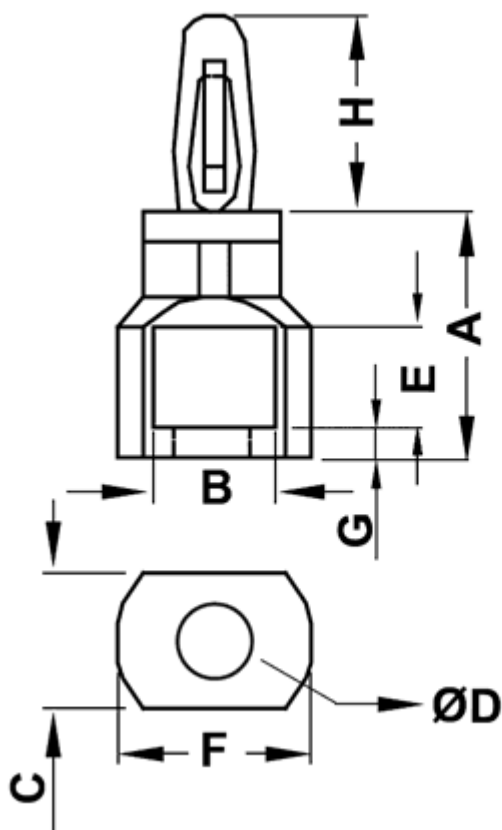

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94 V-2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	C	ØD	E	F	G	H	Top mounting hole dia.	Top panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6252AA00	9.5	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural
6253AA00	11.1	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural
6254AA00	12.7	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural
6255AA00	15.9	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural
6256AA00	19.1	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural
6257AA00	22.2	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural
6258AA00	25.4	6.4	7.1	4.1	5.1	10.2	1.5	10.2	4	1.6	PA 66	UL94 V-2	natural