


FP-6274 - Push mount twist locks

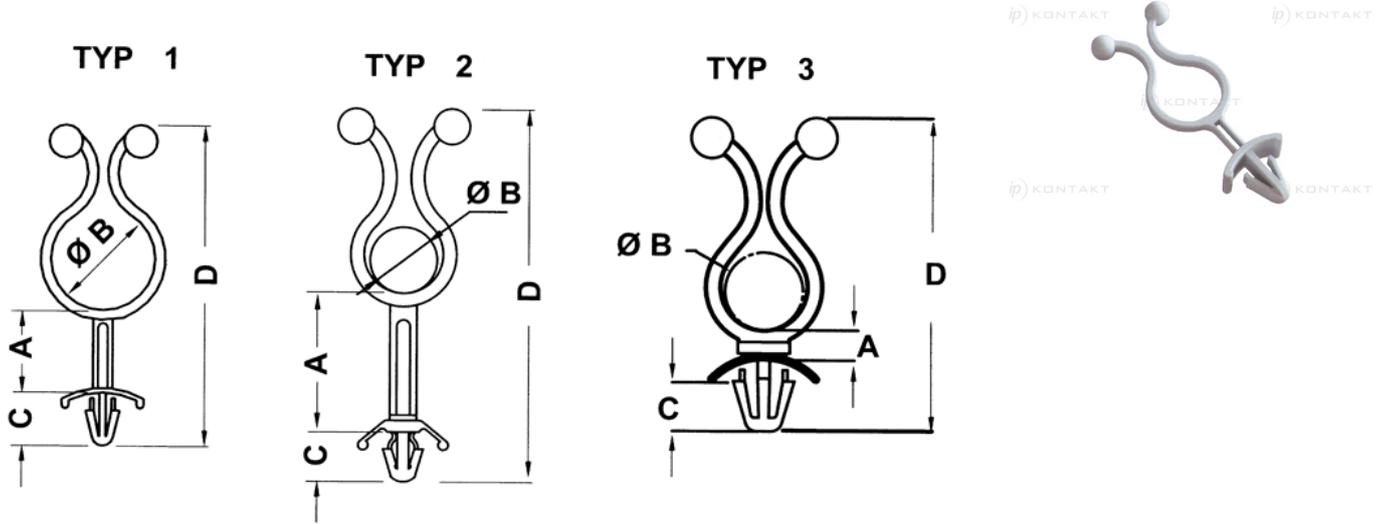

Details:

- **Material:** PA 6.6 UL94V2
- **Color:** natural
- Working temperature: -35°C - 85°C
- Standard pack: 1000 pcs

Symbol	Type	A	Max. cable bundle diameter B	C	D	Mounting hole diameter range	Panel thickness range	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
6274AA00	1	4.2	5.4	8	32.5	4.8	0.8 - 2.0	PA 66	UL94 V-2	natural	1000
6540AA00	1	3.1	7.1	10.6	33.8	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	1000
6541AA00	1	20	7.1	10.6	51	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6542AA00	1	35.3	7.1	10.6	66	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6551AA00	1	10.5	6.8	10.6	43.8	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6552AA00	1	5.6	7	10	34.7	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	1000
6549AA00	1	15.3	9.7	10.8	53.1	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6543AA00	1	3	10.8	10.6	39.6	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	1000
6544AA00	1	20	10.8	10.6	56.8	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6545AA00	1	35.2	10.8	10.6	71.5	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6546AA00	1	3	15	10.6	42	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	1000
6114AA00	1	20.4	15	10.6	59.3	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	1000
6115AA00	1	35.8	15	10.6	74.7	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	1000
6547AA00	1	16.2	18.4	10.6	63.5	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6550AA00	1	5	18.7	10.6	55.3	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
6548AA00	1	3	22.3	9.8	56.8	4.8 - 5.0	1.0 - 3.2	PA 66	UL94 V-2	natural	500
0052AA00	1	12.3	12.5	10.5	53.7	6.5	0.5 - 2.0	PA 66	UL94 V-2	natural	1000
6538AA00	2	3	7.2	5.5	26.7	4	0.8 - 2.2	PA 66	UL94 V-2	natural	1000
6536AA00	2	34	5	7.5	59.8	4.8	0.8 - 2.2	PA 66	UL94 V-2	natural	500
6539AA00	2	43.5	10.1	7.9	78.1	4.8	0.8 - 2.2	PA 66	UL94 V-2	natural	250
6537AA00	2	4.5	10.4	7.5	37.7	4.8	0.8 - 2.2	PA 66	UL94 V-2	natural	1000
6535AA00	2	21	10.4	7.5	56.5	4.8	0.8 - 2.2	PA 66	UL94 V-2	natural	500
8287AA00	3	4	12.7	6.6	42	6	0.8 - 2.0	PA 66	UL94 V-2	natural	1000