


FP-6339 - PCB spacers

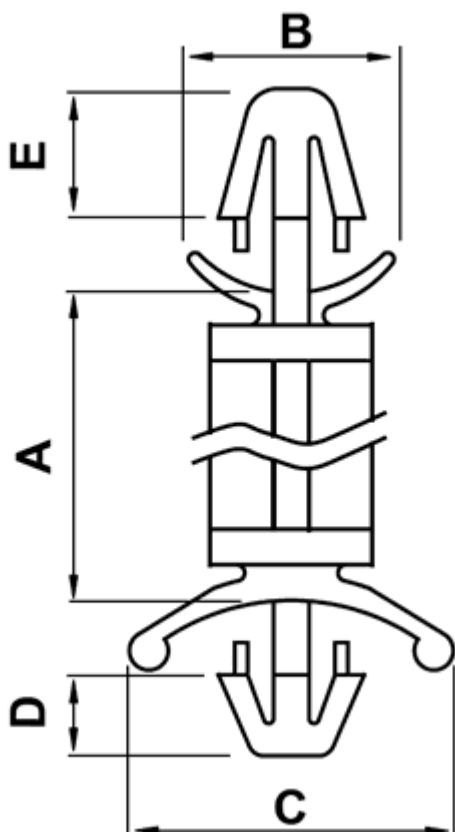

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C

Symbol	Height A	B	C	D	E	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
6339AA00	3.2	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	2000	PA 66	UL94 V-2	natural
6340AA00	4	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	2000	PA 66	UL94 V-2	natural
6341AA00	4.8	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6342AA00	6.4	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6343AA00	7	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6344AA00	8	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6345AA00	9.6	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6346AA00	11.2	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6347AA00	12.7	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6348AA00	14	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6349AA00	16	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6350AA00	18	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural
6351AA00	19.1	6.4	10	2.5	4	3.5	1.6	3.5	0.8 - 2.0	1000	PA 66	UL94 V-2	natural