


## FP-6360 - PCB spacers

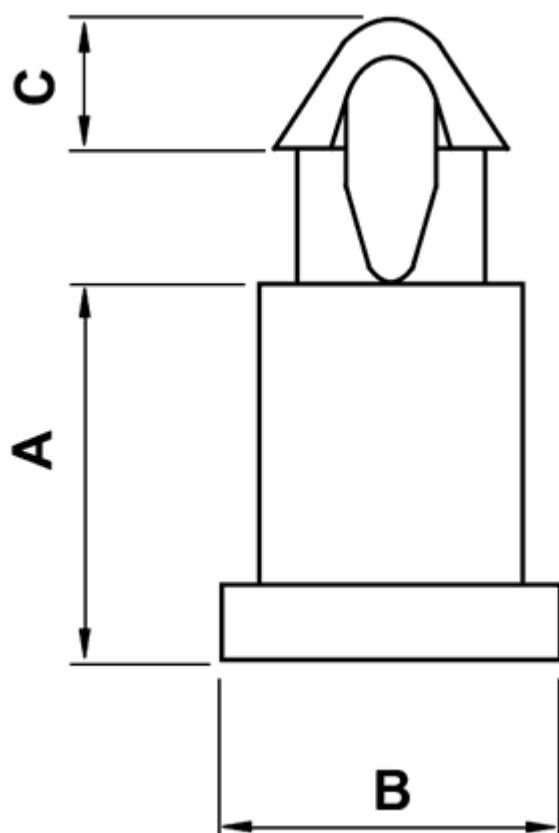

### Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 2000 pcs

| Symbol        | Height<br>A | Ext. diameter<br>B | C    | Mounting hole<br>diameter | Panel thickness range | Material | Flammability | Color   |
|---------------|-------------|--------------------|------|---------------------------|-----------------------|----------|--------------|---------|
|               | [mm]        | [mm]               | [mm] | [mm]                      | [mm]                  |          |              |         |
| 6360AA0001.50 | 1.5         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0002.50 | 2.5         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0002.70 | 2.7         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0003.00 | 3           | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0003.20 | 3.2         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0003.50 | 3.5         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0004.00 | 4           | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0004.50 | 4.5         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0005.00 | 5           | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0005.70 | 5.7         | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |
| 6360AA0006.00 | 6           | 4.5                | 1.6  | 2.5                       | 1.6 - 1.8             | PA 66    | UL94 V-2     | natural |