


FP-6362 - PCB spacers

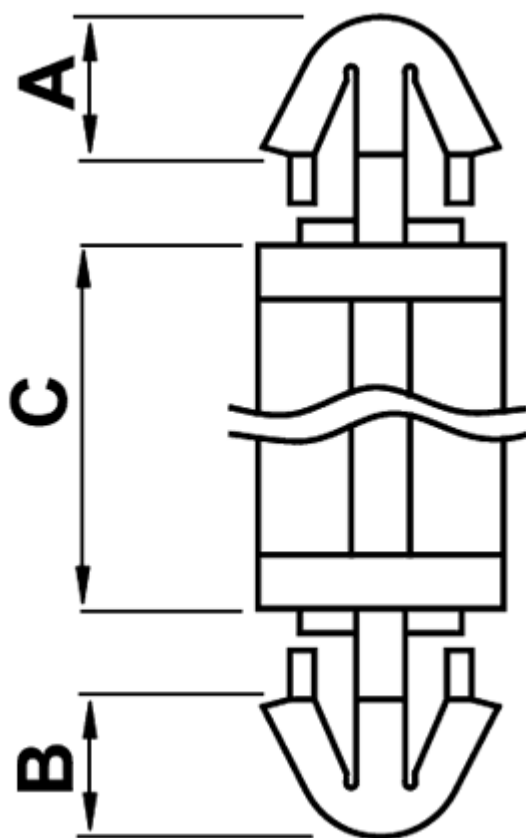

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 2000 pcs

Symbol	A	B	Height C	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
6362AA0002.50	2.8	2.8	2.5	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0003.00	2.8	2.8	3	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0003.50	2.8	2.8	3.5	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0004.00	2.8	2.8	4	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0004.50	2.8	2.8	4.5	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0005.00	2.8	2.8	5	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0005.50	2.8	2.8	5.5	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0006.00	2.8	2.8	6	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0006.35	2.8	2.8	6.35	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0007.00	2.8	2.8	7	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0008.00	2.8	2.8	8	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0009.00	2.8	2.8	9	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0010.00	2.8	2.8	10	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0011.00	2.8	2.8	11	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural
6362AA0012.00	2.8	2.8	12	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural

Symbol	A	B	Height C	Mounting hole diameter	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
6362AA0015.00	2.8	2.8	15	3.5	1.2 - 1.7	PA 66	UL94 V-2	natural