


FP-6364 - PCB spacers

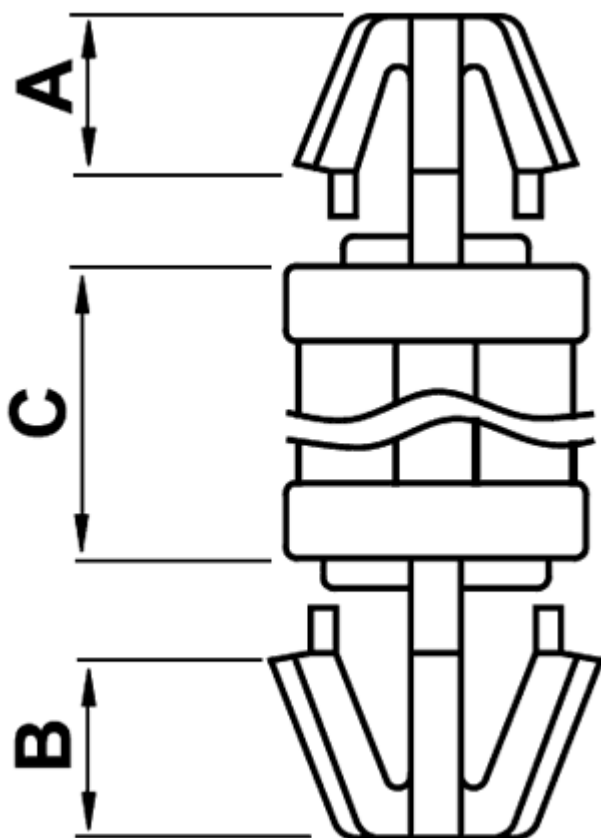

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	A	B	Height C	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6364AA0003.00	3.1	3.7	3	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0004.00	3.1	3.7	4	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0006.00	3.1	3.7	6	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0008.00	3.1	3.7	8	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0010.00	3.1	3.7	10	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0012.00	3.1	3.7	12	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0014.00	3.1	3.7	14	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0016.00	3.1	3.7	16	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural
6364AA0018.00	3.1	3.7	18	4.8	1.6	4	1.6	PA 66	UL94 V-2	natural