


## FP-6365 - PCB spacers

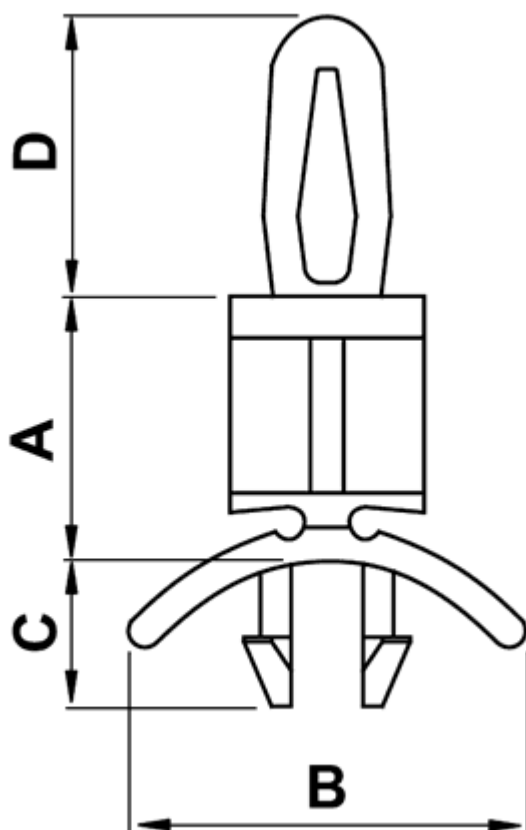

### Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

| Symbol       | Height<br>A | B    | C    | D    | Bottom<br>mounting<br>hole dia. | Bottom panel<br>thickness<br>range | Top<br>mounting<br>hole dia. | Top panel<br>thickness<br>range | Material | Flammability | Color   |
|--------------|-------------|------|------|------|---------------------------------|------------------------------------|------------------------------|---------------------------------|----------|--------------|---------|
|              | [mm]        | [mm] | [mm] | [mm] | [mm]                            | [mm]                               | [mm]                         | [mm]                            |          |              |         |
| 6365AA000480 | 4.8         | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |
| 6365AA000640 | 6.4         | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |
| 6365AA000950 | 9.5         | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |
| 6365AA001270 | 12.7        | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |
| 6365AA001590 | 15.9        | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |
| 6365AA001910 | 19.1        | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |
| 6365AA002220 | 22.2        | 14.4 | 5.4  | 10.2 | 4.8                             | 0.8 - 2.5                          | 4                            | 1.2 - 1.7                       | PA 66    | UL94 V-2     | natural |