


FP-6557 - Adhesive twist locks

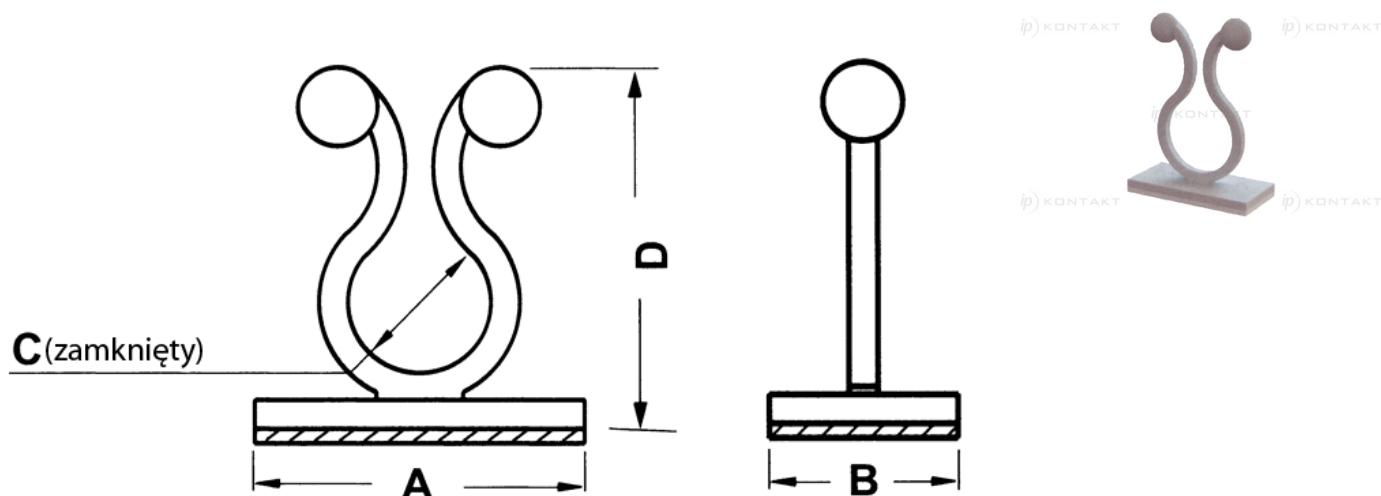

Details:

- **Material:** PA 6.6 UL94V2
- **Color:** natural
- Working temperature: -35°C to 85°C
- Adhesive working temperature: -20°C to 80°C
- 3M adhesive: Close cell PE foam with acrylic adhesive
- Standard pack: 1000 pcs

Symbol	A	B	Max. cable bundle diameter C	D	Material	Flammability	Color	Standard pack
	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
6557AA00AS	10	20	5.8	27.6	PA 66	UL94 V-2	natural	500
6558AA00AS	20	19.8	7.2	21.9	PA 66	UL94 V-2	natural	500
6275AA00AS	25	12.7	8.2	27.9	PA 66	UL94 V-2	natural	1000
6554AA00AS	20	14	8.5	26.2	PA 66	UL94 V-2	natural	500
6555AA00AS	21	13	10	28.2	PA 66	UL94 V-2	natural	500
6525AA00AS	25.4	13	11.4	31.2	PA 66	UL94 V-2	natural	500
6553AA00AS	20	20	13.8	31.9	PA 66	UL94 V-2	natural	250
6559AA00AS	25	13	17	37	PA 66	UL94 V-2	natural	250
6560AA00AS	25	13	20	39	PA 66	UL94 V-2	natural	250
6561AA00AS	28	15	23	41	PA 66	UL94 V-2	natural	250
6556AA00AS	38	19	34	56.2	PA 66	UL94 V-2	natural	100