


FP-6776 - Self-retaining spacer

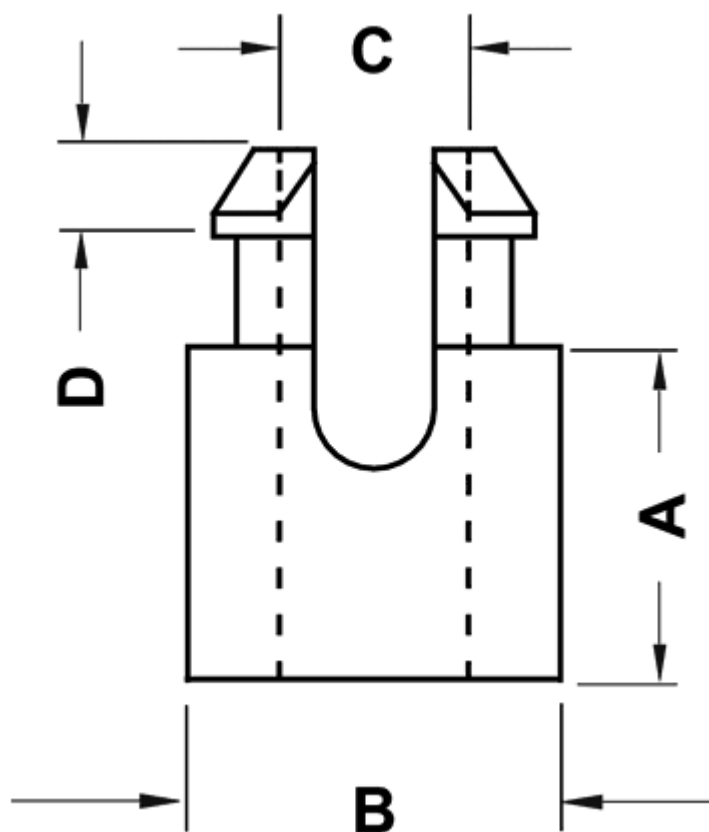

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C

Symbol	Height A	Ext. diameter B	C	D	Top mounting hole dia.	Top panel thickness range	Standard pack
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]
6776AA0003.00	3	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0004.00	4	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0005.00	5	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0006.40	6.4	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0007.90	7.9	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0009.50	9.5	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0011.10	11.1	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0012.00	12	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0012.70	12.7	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0015.90	15.9	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0017.00	17	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0019.10	19.1	7.1	4.2	1.5	5.9	1.2 - 1.7	1000
6776AA0022.20	22.2	7.1	4.2	1.5	5.9	1.2 - 1.7	500
6776AA0025.40	25.4	7.1	4.2	1.5	5.9	1.2 - 1.7	500
6776AA0030.00	30	7.1	4.2	1.5	5.9	1.2 - 1.7	500