


FP-6909 - PCB spacers

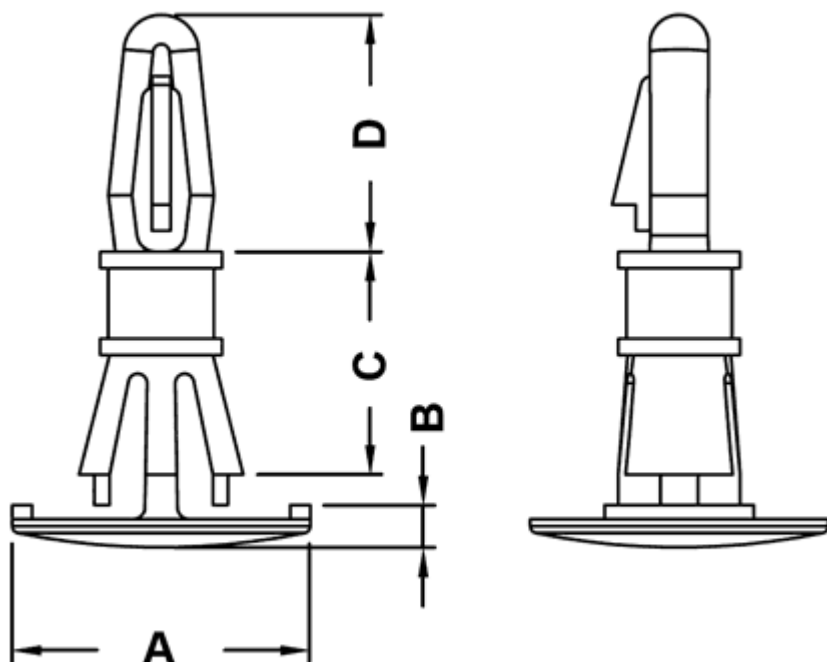

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	A	B	Height C	D	Top mounting hole dia.	Top panel thickness	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
6909AA0006.4	12.7	1.8	6.4	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural
6909AA0009.5	12.7	1.8	9.5	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural
6909AA0012.7	12.7	1.8	12.7	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural
6909AA0015.9	12.7	1.8	15.9	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural
6909AA0019.1	12.7	1.8	19.1	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural
6909AA0022.2	12.7	1.8	22.2	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural
6909AA0025.4	12.7	1.8	25.4	10.3	4	1.6	5.4	1.5 - 1.6	PA 66	UL94 V-2	natural