
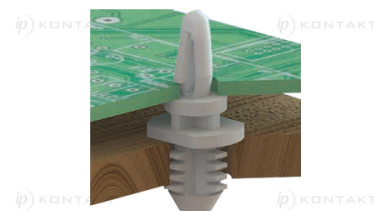


FP-8170 - PCB spacers

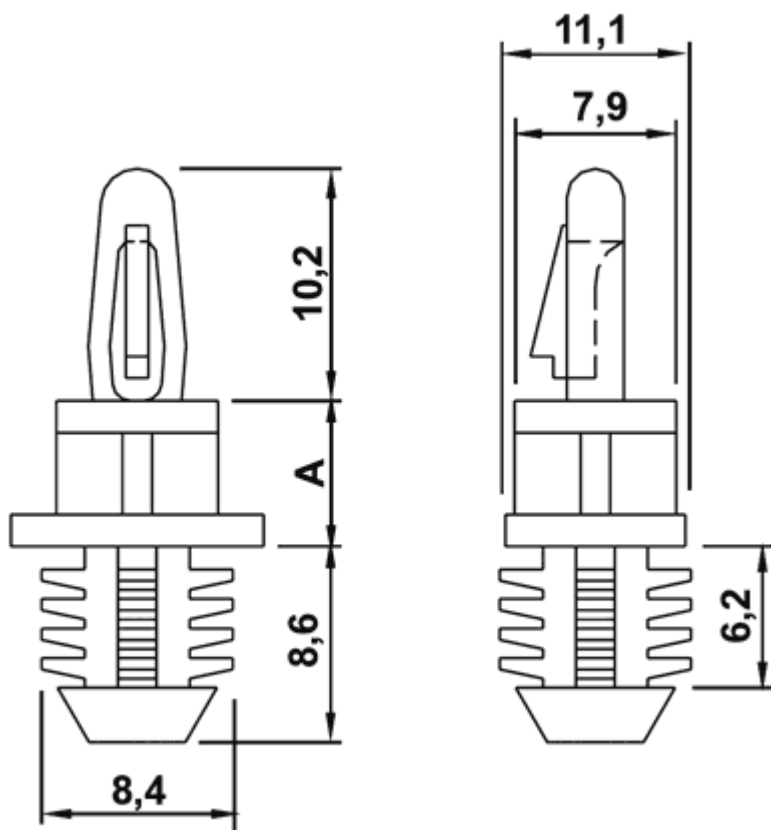

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
8170AA00	4.8	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8171AA00	6.4	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8172AA00	9.5	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8173AA00	11.1	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8174AA00	12.7	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8175AA00	15.9	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8176AA00	19.1	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8177AA00	22.2	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural
8178AA00	25.4	4	1.2 - 1.7	7.9	6.4	PA 66	UL94 V-2	natural