
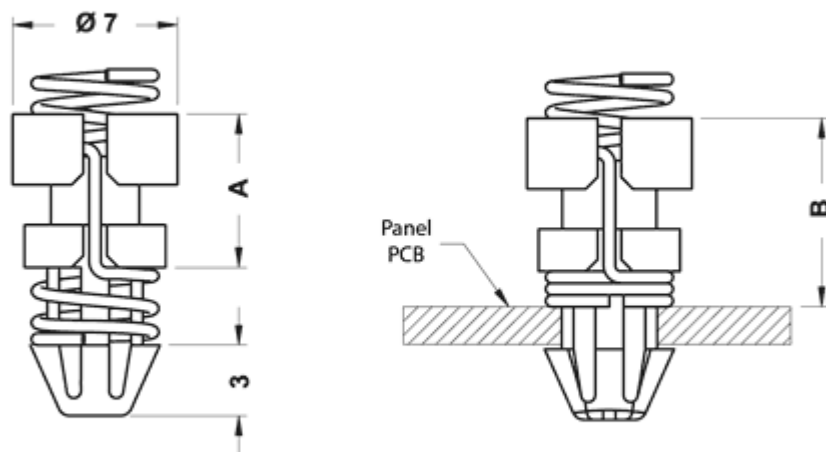


FP-8323 - PCB conductive spacers

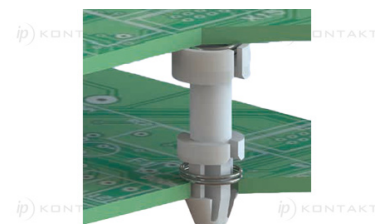

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94 V-2
- Spring material: 1.4301
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	A	Height B	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
8323AA00	6.5	8	4	0.8 - 1.6	PA 66	UL94 V-2	natural
8324AA00	7.5	9	4	0.8 - 1.6	PA 66	UL94 V-2	natural
8325AA00	8.5	10	4	0.8 - 1.6	PA 66	UL94 V-2	natural
8326AA00	10.5	12	4	0.8 - 1.6	PA 66	UL94 V-2	natural
8327AA00	12.5	14	4	0.8 - 1.6	PA 66	UL94 V-2	natural
8328AA00	14.5	16	4	0.8 - 1.6	PA 66	UL94 V-2	natural