


FP-8427 - PCB spacers

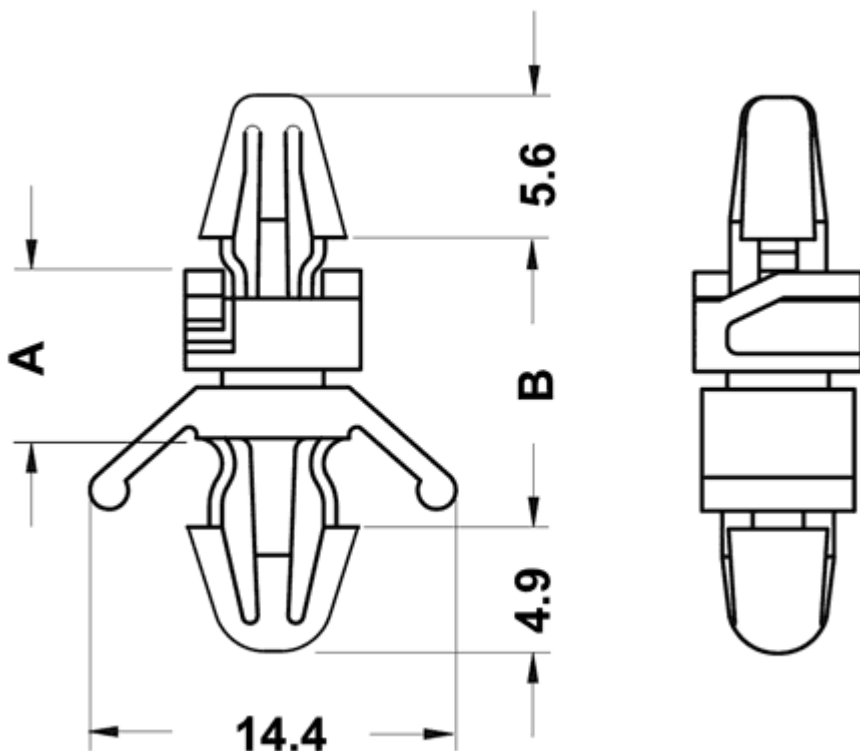

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C
- Standard pack: 1000 pcs

Symbol	Height A	B	Bottom mounting hole dia.	Bottom panel thickness range	Top mounting hole dia.	Top panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
8427AA00	5	9.8	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8428AA00	6.6	11.4	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8429AA00	9.6	14.4	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8430AA00	11.8	16.6	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8431AA00	12.9	17.7	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8432AA00	19.3	24.1	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8433AA00	22.4	27.4	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8434AA00	35.6	30.4	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8435AA00	28.8	33.6	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural
8436AA00	35.1	39.9	4.8	0.8 - 3.0	4	1.2 - 2.0	PA 66	UL94 V-2	natural