


FP-8445 - PCB spacers

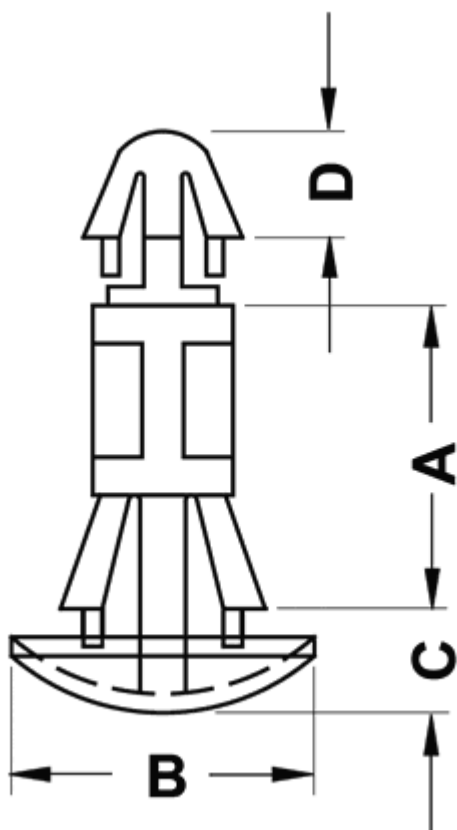

Details:

- **Material:** Nylon 6.6
- **Color:** natural
- Flammability: UL94V2
- UL94V0 available on special order
- Working temperature: -35°C up to +85°C

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
8445AA00	2.5	8	2.7	2.9	3	1.6	4	0.8 - 1.6	2000	PA 66	UL94 V-2	natural
8446AA00	3.2	8	2.7	2.9	3	1.6	4	0.8 - 1.6	2000	PA 66	UL94 V-2	natural
8447AA00	4	8	2.7	2.9	3	1.6	4	0.8 - 1.6	2000	PA 66	UL94 V-2	natural
8448AA00	5	8	2.7	2.9	3	1.6	4	0.8 - 1.6	2000	PA 66	UL94 V-2	natural
8449AA00	7	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8450AA00	8	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8451AA00	9	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8452AA00	10	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8453AA00	12	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8454AA00	14	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8455AA00	16	8	2.7	2.9	3	1.6	4	0.8 - 1.6	1000	PA 66	UL94 V-2	natural
8456AA00	3.5	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8457AA00	4.8	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8458AA00	6.4	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural

Symbol	Height A	B	C	D	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt./pcs]			
8459AA00	7	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8460AA00	8	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8461AA00	10	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8462AA00	11	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8463AA00	12.7	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural
8464AA00	15.9	9.5	2	2.9	3	1.2 - 1.7	5.5	0.6 - 1.2	1000	PA 66	UL94 V-2	natural