


FP-8500 - PG thread cable glands

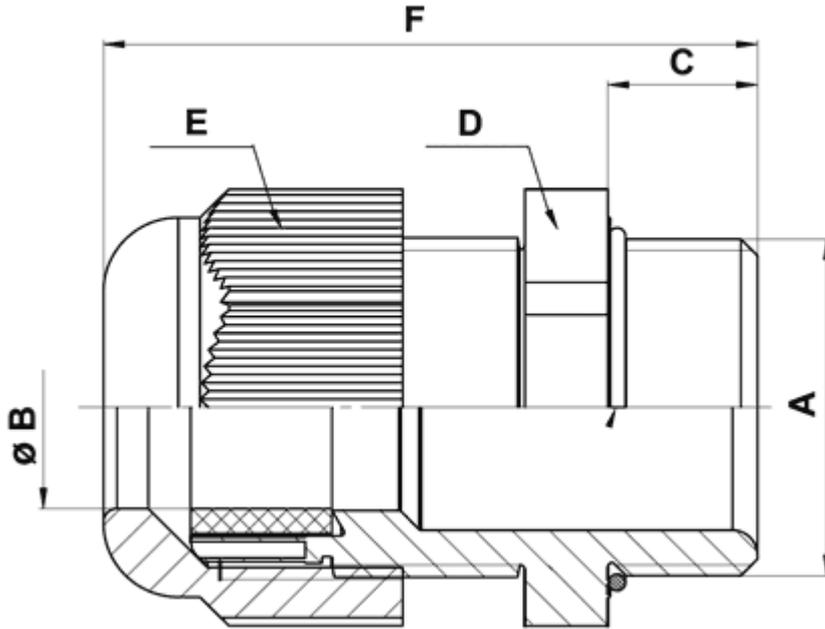

Details:

- Material: **Nylon 6 UL94V2**
- Color: **dark grey (RAL 7001), light grey (RAL 7035), black (RAL 9005)**
- Sealing ring in Polychloroprene - Nitrile CR/NBR.
- International Protection Marking: IP68
- PG as per DIN 40430
- Working temperature: -20°C to +100°C

Symbol	PG thread A	Cable diameter range ØB	Thread length C	Wrench size D	E	F	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
8500AA117001	PG7	3.0 - 6.5	8	15	15	30.5	PA 6	UL94 V-2	dark gray	100
8501AA117001	PG9	4.0 - 8.0	8	19	19	34	PA 6	UL94 V-2	dark gray	100
8502AA117001	PG11	5.0 - 10.0	8	22	22	37	PA 6	UL94 V-2	dark gray	100
8503AA117001	PG13.5	6.0 - 12.0	9	24	24	39	PA 6	UL94 V-2	dark gray	100
8504AA117001	PG16	10.0 - 14.0	10	27	27	42.5	PA 6	UL94 V-2	dark gray	50
8505AA117001	PG21	13.0 - 18.0	11	33	33	47.5	PA 6	UL94 V-2	dark gray	50
8506AA117001	PG29	18.0 - 25.0	11	42	42	53	PA 6	UL94 V-2	dark gray	25
8507AA117001	PG36	22.0 - 32.0	13	53	53	61	PA 6	UL94 V-2	dark gray	10
8508AA117001	PG42	30.0 - 38.0	13	60	60	65	PA 6	UL94 V-2	dark gray	5
8509AA117001	PG48	34.0 - 44.0	14	65	65	67	PA 6	UL94 V-2	dark gray	5
8510AA117035	PG7	3.0 - 6.5	8	15	15	30.5	PA 6	UL94 V-2	light gray	100
8511AA117035	PG9	4.0 - 8.0	8	19	19	34	PA 6	UL94 V-2	light gray	100
8512AA117035	PG11	5.0 - 10.0	8	22	22	37	PA 6	UL94 V-2	light gray	100
8513AA117035	PG13.5	6.0 - 12.0	9	24	24	39	PA 6	UL94 V-2	light gray	100

Symbol	PG thread A	Cable diameter range ØB	Thread length C	Wrench size D	E	F	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
8514AA117035	PG16	10.0 - 14.0	10	27	27	42.5	PA 6	UL94 V-2	light gray	50
8515AA117035	PG21	13.0 - 18.0	11	33	33	47.5	PA 6	UL94 V-2	light gray	50
8516AA117035	PG29	18.0 - 25.0	11	42	42	53	PA 6	UL94 V-2	light gray	25
8517AA117035	PG36	22.0 - 32.0	13	53	53	61	PA 6	UL94 V-2	light gray	10
8518AA117035	PG42	30.0 - 38.0	13	60	60	65	PA 6	UL94 V-2	light gray	5
8519AA117035	PG48	34.0 - 44.0	14	65	65	67	PA 6	UL94 V-2	light gray	5
8520AA019005	PG7	3.0 - 6.5	8	15	15	30.5	PA 6	UL94 V-2	black	100
8521AA019005	PG9	4.0 - 8.0	8	19	19	34	PA 6	UL94 V-2	black	100
8522AA019005	PG11	5.0 - 10.0	8	22	22	37	PA 6	UL94 V-2	black	100
8523AA019005	PG13.5	6.0 - 12.0	9	24	24	39	PA 6	UL94 V-2	black	100
8524AA019005	PG16	10.0 - 14.0	10	27	27	42.5	PA 6	UL94 V-2	black	50
8525AA019005	PG21	13.0 - 18.0	11	33	33	47.5	PA 6	UL94 V-2	black	50
8526AA019005	PG29	18.0 - 25.0	11	42	42	53	PA 6	UL94 V-2	black	25
8527AA019005	PG36	22.0 - 32.0	13	53	53	61	PA 6	UL94 V-2	black	10
8528AA019005	PG42	30.0 - 38.0	13	60	60	65	PA 6	UL94 V-2	black	5
8529AA019005	PG48	34.0 - 44.0	14	65	65	67	PA 6	UL94 V-2	black	5