


FP-8820 - Brass PG thread cable glands

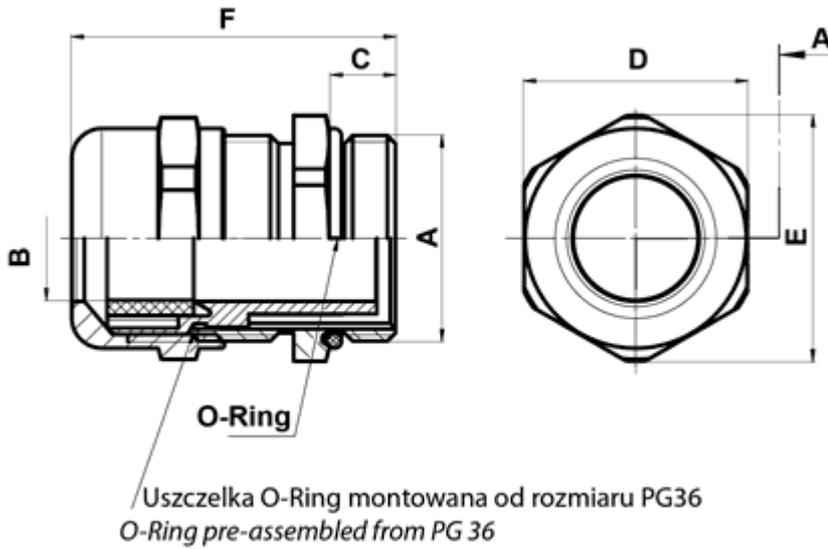

Details:

- **Material: Nickel plated brass**
- **Lamellar insert: PA 6 V-2**
- **Sealing ring: Polychloroprene nitrile**
- Working temperature: -20°C up to +100°C
- Protection grade: IP68
- PG as per DIN 40430

Symbol	PG thread	Cable diameter range ØB	C [mm]	D [mm]	E [mm]	F [mm]	Material	Standard pack
		[mm]						[szt./pcs]
8820MA92	PG7	3.0 - 6.5	5	14	14	24	brass, nickel plated	100
8904MA92	PG9	4.0 - 8.0	6	17	17	29	brass, nickel plated	100
8905MA92	PG11	5.0 - 10.0	6	20	20	29.5	brass, nickel plated	50
8906MA92	PG13.5	6.0 - 12.0	6.5	22	22	31.5	brass, nickel plated	50
8907MA92	PG16	10.0 - 14.0	6.5	24	24	31.5	brass, nickel plated	50
8908MA92	PG21	13.0 - 18.0	7	30	30	34	brass, nickel plated	50
8909MA92	PG29	18.0 - 25.0	8	40	40	39	brass, nickel plated	25
8910MA92	PG36	24.0 - 32.0	9	50	50	45	brass, nickel plated	10
8911MA92	PG42	30.0 - 38.0	10	57	57	49	brass, nickel plated	5
8912MA92	PG48	34.0 - 44.0	10	64	64	52	brass, nickel plated	5