


**FP-8821 -**

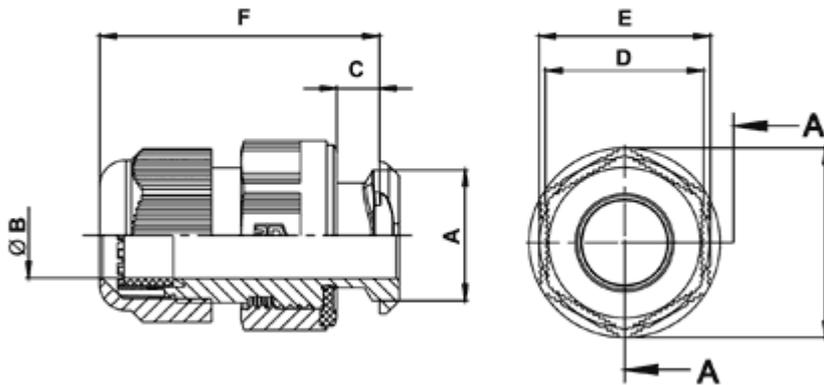

Details:

- Material Dome nut: Nylon 6
- **Material gland body: Nylon 6**
- Material mounting nut: Nylon 6 GF30
- Material O-Ring: NBR/PTFE
- Protection grade: IP68
- Flammability: UL94V2
- Material Sealing ring: Polychloroprene - Nitrile CR/NBR
- Operating temperature: -20°C ~ +100° C
- **Color: dark grey (RAL 7001), light grey (RAL 7035), black (RAL 9005)**
- Metric as per DIN EN 50262

Symbol	Metric thread A	Mounting hole diameter range	Cable diameter range ØB	C	Wrench size D	E	F	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
8821AA117001	M16	16.1 - 16.3	5 - 10	1.0 - 4.0	20	24	38.5	PA 6	UL94 V-2	dark gray	100
8822AA117001	M20	20.1 - 20.4	8 - 13	1.0 - 4.0	24	26	42.5	PA 6	UL94 V-2	dark gray	100
8823AA117001	M25	25.1 - 25.4	11 - 17	1.0 - 4.0	29	32	48	PA 6	UL94 V-2	dark gray	50
8836AA117001	M32	32.1 - 32.4	15 - 21	1.0 - 4.0	36	42	58.5	PA 6	UL94 V-2	dark gray	25
8821AA117035	M16	16.1 - 16.3	5 - 10	1.0 - 4.0	20	24	38.5	PA 6	UL94 V-2	light gray	100

Symbol	Metric thread A	Mounting hole diameter range	Cable diameter range ØB	C	Wrench size D	E	F	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
8822AA117035	M20	20.1 - 20.4	8 - 13	1.0 - 4.0	24	26	42.5	PA 6	UL94 V-2	light gray	100
8823AA117035	M25	25.1 - 25.4	11 - 17	1.0 - 4.0	29	32	48	PA 6	UL94 V-2	light gray	50
8836AA117035	M32	32.1 - 32.4	15 - 21	1.0 - 4.0	36	42	58.5	PA 6	UL94 V-2	light gray	25
8821AA019005	M16	16.1 - 16.3	5 - 10	1.0 - 4.0	20	24	38.5	PA 6	UL94 V-2	black	100
8822AA019005	M20	20.1 - 20.4	8 - 13	1.0 - 4.0	24	26	42.5	PA 6	UL94 V-2	black	100
8823AA019005	M25	25.1 - 25.4	11 - 17	1.0 - 4.0	29	32	48	PA 6	UL94 V-2	black	50
8836AA019005	M32	32.1 - 32.4	15 - 21	1.0 - 4.0	36	42	58.5	PA 6	UL94 V-2	black	25