


## FP-8840 - Screw plugs

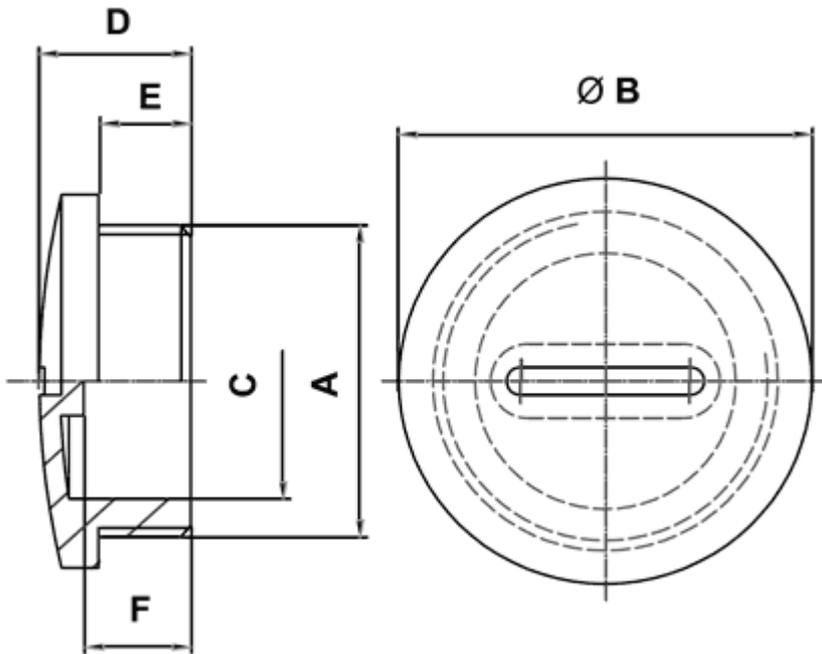

### Details:

- **Material: Nylon 6 GV 30**
- **Color: light grey (RAL 7035)**
- **Color: RAL 7001 and RAL 9005 on special order**
- Flammability: UL94 V-2
- Protection grade: IP54
- Working temperature: -30°C up to +100°C
- PG as per DIN 40430

Symbol	PG thread A	B	C	D	E	F	Material	Flammability	Color	Standard pack
		[mm]	[mm]	[mm]	[mm]	[mm]				[szt./pcs]
8840BB117035	PG7	15	9	10	6	7	PA 6 + 30% GF	UL94 V-2	light gray	100
8871BB117035	PG9	19	11.5	10	6	7	PA 6 + 30% GF	UL94 V-2	light gray	100
8842BB117035	PG11	22	14	10	6	7	PA 6 + 30% GF	UL94 V-2	light gray	100
8642BB117035	PG13.5	25	15.5	10	6	7	PA 6 + 30% GF	UL94 V-2	light gray	100
8844BB117035	PG16	27	17	10	6	7	PA 6 + 30% GF	UL94 V-2	light gray	100
8872BB117035	PG21	33	23	12.5	8	9	PA 6 + 30% GF	UL94 V-2	light gray	100
8873BB117035	PG29	44.5	31.5	13	8	9	PA 6 + 30% GF	UL94 V-2	light gray	100
8874BB117035	PG36	55.5	40.5	15	10	10	PA 6 + 30% GF	UL94 V-2	light gray	50
8875BB117035	PG42	62.5	47.5	15.5	10	10	PA 6 + 30% GF	UL94 V-2	light gray	50
8876BB117035	PG48	69.5	52.5	17	12	11.5	PA 6 + 30% GF	UL94 V-2	light gray	50